



contractorplus

2025

RAB®



contractorplus

What is Contractor Plus...

We understand the importance of finding reliable and affordable lighting solutions for your projects. Our **Contractor+** portfolio is designed to maximize flexibility at competitive prices, all with a warranty that's got your back. Whether you're looking for indoor or outdoor lighting solutions, our **Contractor+** series has you covered.

TABLE OF CONTENTS

Indoor

PAGE

- 5 Panels & Troffers
- 8 High Bays
- 15 Washdowns
- 17 Strips & Wraps
- 21 Surface Mount & Downlights
- 26 Downlight Retrofits
- 33 Canless Downlight
- 46 Cylinders
- 48 Vanity

Lamps

PAGE

- 85 A19s & Reflectors
- 89 Linear

Outdoor

PAGE

- 51 Floodlights
- 58 Traditional Wall Packs
- 64 Cutoff Wall Packs & Entry Lights
- 69 Area Lights
- 74 Garage & Canopy Lights
- 77 Landscape Lighting
- 81 Temporary Lighting

Exit & Emergency

PAGE

- 92 Exit Signage
- 94 Emergency Lighting

Wireless Controls

Wireless network lighting controls are an easy way to automate lighting and save energy. With two Lightcloud platforms to choose from we can meet any application need for every budget. Both systems utilize a mesh network allowing each device to communicate with one another.

What does the the customer need?	Lightcloud® Blue	Lightcloud®
Product portfolio	Lamps, Indoor, Outdoor, Sensors	Lamps, Indoor, Outdoor, Sensors
Luminaire level control	✓	✓
Motor load control		✓
Circuit level control		✓
Gateway required		✓
Communication protocol	Bluetooth Mesh	Zigbee Cellular
Wireless range	60 ft. <i>(varies by device)</i>	100 ft.
Max. users per account	1 ¹	Unlimited
Max. devices per account	38,400 ²	Unlimited ³
System comissioning	User	RAB+User
Energy reporting		✓
System integration		✓
User permissions		✓
Multi-location management		✓

1. Limit 1 user per account with the ability to share Site profiles with unlimited users.

2. Max of 600 devices per Site, up to 64 Sites per Account.

3. 200 devices per Gateway with unlimited Gateways.

Panels & Troffers



	SWISH® 34	T34™ FA
Available Sizes	2X2, 2X4, 1X4	2X2, 2X4, 1X4
Field-Adjustable CCT	✓	✓
Field-Adjustable Wattage	✓	✓
Standalone Sensors	PIR, MVS	MVS
Lightcloud®	Controller	Controller
Lightcloud® Blue	PIR, MVS	Controller, PIR, MVS
DLC Listing	Premium	Standard



SWISH® 34



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy
2X2	SWISH34-2X2	 3500K 4000K 5000K	30/25/18W	(4) F17T8	3,700	133
2X4	SWISH34-2X4	 3500K 4000K 5000K	40/35/30W	(3) F32T8	5,509	144
1X4	SWISH34-1X4	 3500K 4000K 5000K	30/25/18W	(2) F32T8	4,109	146

White

Finishes



OPTIONS

Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
Battery Backup	/E	Lightcloud® Control	/LC
Passive Infrared Occupancy Sensor	/PIR	Lightcloud® Control w/ Battery Backup	/LC/E
Microwave Occupancy Sensor	/MVS	Lightcloud® Blue PIR Sensor	/LCBS
Passive Infrared Occupancy Sensor w/ Battery Backup	/PIR/E	Lightcloud® Blue MVS Sensor	/LCBS/MVS
Microwave Occupancy Sensor w/ Battery Backup	/MVS/E	Lightcloud® Blue PIR Sensorw/ Battery Backup	/LCBS/E
		Lightcloud® Blue MVS Sensor w/ Battery Backup	/LCBS/MVS/E

Sensor Accessories

Catalog No.

MSR1 - Remote Control for Microwave Sensor

T34™ FA



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy
2X2	T34FA-2X2	 3500K 4000K 5000K	40/30/20W	(4) F17T8 (4) F14T5	4,328	134
2X4	T34FA-2X4	 3500K 4000K 5000K	50/40/30W	(3) F32T8 (3) F28T5	6,027	139
1X4	T34FA-1X4	 3500K 4000K 5000K	40/30/20W	(2) F32T8 (2) F28T5	4,089	128

White

Finishes



OPTIONS

Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
Battery Backup	/E	Lightcloud* Control	/LC
Microwave Occupancy Sensor	/MVS	Lightcloud* Blue*	/LCB
		Lightcloud* Blue PIR Sensor*	/LCBS
		Lightcloud* Blue MVS Sensor*	/LCBS/MVS
		Lightcloud* Blue w/Battery Backup	/LCBS/E
		Lightcloud* Blue PIR Sensor w/Battery Backup	/LCBS/E
		Lightcloud* Blue MVS Sensor w/Battery Backup	/LCBS/MVS/E

*CCT is adjusted from the LCB app (3000-6500K) SmartShift™ capable

Surface Mount Kits

Catalog No.

SMKPANEL2X2 - 2'X2' Surface Kit

SMKPANEL2X4 - 2'X4' Surface Kit

SMKPANEL1X4 - 1'X4' Surface Kit

Pendant Mount Kits

Catalog No.

PMKEZPAN2X2 - 2'X2' Pendant Kit

PMKEZPAN2X4 - 2'X4' Pendant Kit

PMKEZPAN1X4 - 1'X4' Pendant Kit

Recessed Mount Kits

Catalog No.

RMKPANEL2X2 - 2'X2' Recessed Kit

RMKPANEL2X4 - 2'X4' Recessed Kit

RMKPANEL1X4 - 1'X4' Recessed Kit

Sensor Accessories

Catalog No.

MVSREM - Remote Control for

Microwave Sensor

High Bays



	RBAY15™	RBAY17™	RBAY22™	L34™	H15™	H17™	H22™
Type	Linear	Linear	Linear	Linear	Round	Round	Round
Available Sizes	S, M, L	S, M, L	S, M, L	20"	Std, XL	S, Std, XL, XXL	Std, XL
Field-Adjustable CCT	✓	✓	✓		✓	✓	✓
Field-Adjustable Wattage	✓	✓	✓		✓	✓	✓
Adjustable Optics	✓		✓	✓			✓
Standalone Sensors	PIR, MVS	PIR, MVS	PIR, MVS	MVS	PIR, MVS	PIR, MVS	PIR, MVS
Lightcloud®				Controller, Sensor			
Lightcloud® Blue	Controller + Sensor	Controller + Sensor	Controller + Sensor		Controller + Sensor	Controller + Sensor	Controller + Sensor
DLC Listing	Premium	Premium	Premium	Standard	Premium	Premium	Premium

RBAY15



SELECTABLE
BEAM



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
SMALL	RBAY15S	3500K 4000K 5000K	130/100/80W	(6) T5HO 400W MH	21,019	20 - 35'
MEDIUM	RBAY15M	3500K 4000K 5000K	260/220/160W	750W MH	41,007	25 - 50'
LARGE	RBAY15L	3500K 4000K 5000K	400/320/260W	1,000W MH	61,016	30 - 60'

White

Finishes



OPTIONS

Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
480V w/ 0-10V Dimming	/480	Lightcloud® Blue PIR Sensor*	/LCBS
Battery Backup	/E	Lightcloud® Blue PIR Sensor w/Battery Backup	/LCBS/E

Pendant Mount Kits

Catalog No.

PMKRBAY15S - Small
PMKRBAY15 - Medium & Large
PM-EM-RBAY15S - Small
w/Battery Backup

Surface Mount Kits

Catalog No.

SMKRBAY15S - Small
SMKRBAY15 - Medium & Large

Wire Guard

Catalog No.

GDRBAY15S - Small
GDRBAY15M - Medium
GDRBAY15L - Large

Sensor Accessories

Catalog No.

PIR20 - PIR Sensor Kit
PIR40 - PIR Sensor Kit
MVS20 - MVS Sensor Kit
MVS50 - MVS Sensor Kit
PIR20/LCB - PIR Sensor Kit w/
Lightcloud® Blue
PIR40/LCB - PIR Sensor Kit w/
Lightcloud® Blue
MVS20/LCB - MVS Sensor Kit w/
Lightcloud® Blue
MVS50/LCB - MVS Sensor Kit w/
Lightcloud® Blue
MSR1 - Remote Control for
Microwave Sensor



RBAY17



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
SMALL	RBAY17S	3500K 4000K 5000K	130/100/80W	(6) T5HO 400W MH	19,432	20 - 35'
MEDIUM	RBAY17M	3500K 4000K 5000K	260/220/160W	750W MH	40,539	25 - 50'
LARGE	RBAY17L	3500K 4000K 5000K	400/320/260W	1,000W MH	59,933	30 - 60'

White

Finishes



OPTIONS

Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
480V w/ 0-10V Dimming	/480	Lightcloud® Blue PIR Sensor*	/LCBS
Battery Backup	/E ¹	Lightcloud® Blue PIR Sensor w/Battery Backup	/LCBS/E ¹
8' Cord	/8C		
8' Cord, Straight Blade Plug 120V, NEMA 5-15P	/8CP ¹		
8' Cord, Straight Blade Plug 277V, NEMA 7-15P	/8CP2 ¹		
8' Cord, Twistlock Plug 480V, NEMA L8-20	/8CPT4 ²		
Battery Backup w/8' Cord	/E/8C		
Battery Backup w/8' Cord, Straight Blade Plug 120V, NEMA 5-15P	/E/8PCP ¹		
Battery Backup w/8' Cord, Straight Blade Plug 277V, NEMA 7-15P	/E/8PCP2 ¹		
Battery Backup w/8' Cord, Straight Blade Plug 480V, NEMA L8-20	/E/8PCPT4 ²		

1. Available only for 120-277V models

2. Available only for 480V models

Pendant Mount Kits

Catalog No.

PMKRBY17S - Small
PMKRBY17M - Medium
PMKRBY17L - Large
PM-EM-RBY17S - Small
w/Battery Backup

Surface Mount Kits

Catalog No.

SMKRBY17S - Small
SMKRBY17 - Medium & Large
SM-EM-RBY17S - Small
w/Battery Backup

Wire Guard

Catalog No.

GDRBY17S - Small
GDRBY17M - Medium
GDRBY17L - Large

Sensor Accessories

Catalog No.

PIR20 - PIR Sensor Kit
PIR40 - PIR Sensor Kit
MVS20 - MVS Sensor Kit
MVS50 - MVS Sensor Kit
PIR20/LCB - PIR Sensor Kit w/
Lightcloud® Blue
PIR40/LCB - PIR Sensor Kit w/
Lightcloud® Blue
MVS20/LCB - MVS Sensor Kit w/
Lightcloud® Blue
MVS50/LCB - MVS Sensor Kit w/
Lightcloud® Blue
MSR1 - Remote Control for
Microwave Sensor



LINEAR HIGH BAYS

RBAY22



SELECTABLE
BEAM



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
SMALL	RBAY22S	3500K 4000K 5000K	160/130/100W	(6) T5HO 400W MH	23,224	20 - 35'
MEDIUM	RBAY22M	3500K 4000K 5000K	260/220/160W	750W MH	37,056	25 - 50'
LARGE	RBAY22L	3500K 4000K 5000K	320/260/200W	1,000W MH	48,221	30 - 60'

White

Finishes



Pendant Mount Kit

Catalog No.

PMKRBAY22 - Pendant Mount
Kit White

Battery Backup

Catalog No.

EMHB30 - EM BATT 30W 150W-240W White
EMHB60 - EM BATT 60W 500W White
EMHB30/LCB - EM BATT 30W 150W-240W
White with Lightcloud® Blue
EMHB60/LCB - EM BATT 60W 500W White
with Lightcloud® Blue
EMHB40/480 - EM BATT 40W White
for 480V Models

Sensor Accessories

Catalog No.

PIR20 - PIR Sensor Kit
PIR40 - PIR Sensor Kit
MVS20 - MVS Sensor Kit
MVS50 - MVS Sensor Kit
PIR20/LCB - PIR Sensor Kit w/Lightcloud® Blue
PIR40/LCB - PIR Sensor Kit w/Lightcloud® Blue
MVS20/LCB - MVS Sensor Kit w/Lightcloud® Blue
MVS50/LCB - MVS Sensor Kit w/Lightcloud® Blue
MSR1 - Remote Control for Microwave Sensor

L34™



110	L34-110	● 5000K	100W	(6) F32T8 250W MH	13,534	20 - 25'
180	L34-180	● 5000K	160W	(8) F32T8, (6) T5HO, 400W MH	20,996	20 - 40'

White

Finishes



OPTIONS

Adder
Lightcloud® Controller
Lightcloud® Sensor

Catalog No. Suffix
/LC
/LCS

Adder
Microwave Occupancy Sensor

Catalog No. Suffix
/MVS

Sensor Accessories Catalog No. MVSREM - Remote Control for Microwave Sensor



H15™



FIELD ADJ.



0-10V



100,000 HRS



IP65 RATING



BAT. BACKUP



120-277-480V

Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
STANDARD	H15B	 3000K 4000K 5000K	150/120/100W	400W MH	23,024	20 - 30'
XL	H15XLB	 3000K 4000K 5000K	240/200/150W	750W MH	35,618	20 - 30'

Black

Finish



OPTIONS

Adder

480V w/ 0-10V Dimming

Catalog No. Suffix

/480

Sensor Accessories

Catalog No.

PIR20B - PIR Sensor Kit, Black

PIR40B - PIR Sensor Kit, Black

MVS20 - MVS Sensor Kit, White

MVS20B - MVS Sensor Kit, Black

MVS50B - MVS Sensor Kit, Black

PIR20B/LCB - PIR Sensor Kit Black with Lightcloud® Blue

PIR40B/LCB - PIR Sensor Kit Black with Lightcloud® Blue

MVS20B/LCB - MVS Sensor Kit Black with Lightcloud® Blue

MVS50B/LCB - MVS Sensor Kit Black with Lightcloud® Blue

Battery Backup

Catalog No.

EMHB30B - EM BATT 30W 150W-240W Black

H17™



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
SMALL	H17S	3000K 4000K 5000K	100/80/60W	(8) F32T8 (3) F5HO	14,959	20 - 30'
STANDARD	H17	3000K 4000K 5000K	150/120/100W	400W MH	22,224	20 - 30'
XL	H17XL	3000K 4000K 5000K	240/200/150W	750W MH	37,253	20 - 50'
XXL	H17XXL	3000K 4000K 5000K	500/400/300W	1500W MH	79,203	20 - 50'



Optical Accessories

Catalog No.

- H17-RAL - H17 Aluminum Reflector¹
- H17XL-RAL - H17 XL Aluminum Reflector¹
- H17-RPC - H17 Polycarbonate Refractor
- H17XL-RPC - H17 XL Polycarbonate Refractor

Catalog No.

- H17-WG - H17 Wireguard White²
 - H17XL-WG - H17 XL Wireguard White²
 - H17XXL-WG - H17 XXL Wireguard White²
 - H17-RDL - H17 Drop Lens³
 - H17B-WG - H17 Wireguard Black²
 - H17XXLB-WG - H17 XXL Wireguard Black
1. Aluminum Reflector can't be used with Drop Lens
2. Wire Guard can't be used with Drop Lens
3. Drop Lens can only be used in combination with Polycarbonate Refractor

Sensor Accessories

Catalog No.

- PIR20 - PIR Sensor Kit, White
- PIR20B - PIR Sensor Kit, Black
- PIR40 - PIR Sensor Kit, White
- PIR40B - PIR Sensor Kit, Black
- MVS20 - MVS Sensor Kit, White
- MVS20B - MVS Sensor Kit, Black
- MVS50 - MVS Sensor Kit, White
- MVS50B - MVS Sensor Kit, Black
- PIR20/LCB - PIR Sensor Kit White with Lightcloud® Blue
- PIR20B/LCB - PIR Sensor Kit Black with Lightcloud® Blue
- PIR40/LCB - PIR Sensor Kit White with Lightcloud® Blue

Catalog No.

- PIR40B/LCB - PIR Sensor Kit Black with Lightcloud® Blue
- MVS20/LCB - MVS Sensor Kit White with Lightcloud® Blue
- MVS20B/LCB - MVS Sensor Kit Black with Lightcloud® Blue
- MVS50/LCB - MVS Sensor Kit with Lightcloud® Blue
- MVS50B/LCB - MVS Sensor Kit Black with Lightcloud® Blue
- MSR1 - Remote Control for Microwave Sensor

Mounting Accessories

Catalog No.

- H17-SM KIT - H17 Yoke Surface Mount White
- H17-PM KIT - Pendant Mount Kit White with Adaptor
- H17XXL-SM KIT - H17 Yoke Surface Mount White
- H17XXL-PM KIT - Pendant Mount Kit White with Adaptor
- H17B-SM KIT - H17 Yoke Surface Mount Black
- H17B-PM KIT - Pendant Mount Kit Black with Adaptor
- H17XXLB-SM KIT - H17 Yoke Surface Mount Black
- H17XXLB-PM KIT - Pendant Mount Kit Black with Adaptor

Battery Backup

Catalog No.

- EMHB30 - EM BATT 30W 150W-240W White
- EMHB30B - EM BATT 30W 150W-240W Black
- EMHB60 - EM BATT 60W 500W White
- EMHB60B - EM BATT 60W 500W Black
- EMHB30/LCB - EM BATT 30W 150W-240W White with Lightcloud® Blue
- EMHB30B/LCB - EM BATT 30W 150W-240W Black with Lightcloud® Blue
- EMHB60/LCB - EM BATT 60W 500W White with Lightcloud® Blue
- EMHB60B/LCB - EM BATT 60W 500W Black with Lightcloud® Blue



H22™



SELECTABLE
BEAM



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
STANDARD	H22	 3000K 4000K 5000K	150/120/100W	400W MH	22,580	20 - 30'
XL	H22XL	 3000K 4000K 5000K	240/200/150W	750W MH	36,092	20 - 30'

Finish  White



OPTIONS

Adder Catalog No. Suffix
480V w/ 0-10V Dimming /480

Mounting Accessories

Catalog No.

H22-PM KIT - Pendant Mount Kit White with Adaptor

Sensor Accessories

Catalog No.

PIR20 - PIR Sensor Kit
PIR40 - PIR Sensor Kit
MVS20 - MVS Sensor Kit
MVS50 - MVS Sensor Kit
PIR20/LCB - PIR Sensor Kit with Lightcloud® Blue
PIR40/LCB - PIR Sensor Kit with Lightcloud® Blue
MVS20/LCB - MVS Sensor Kit with Lightcloud® Blue
MVS50/LCB - MVS Sensor Kit with Lightcloud® Blue
MSR1 - Remote Control for Microwave Sensor

Battery Backup

Catalog No.

EMHB30 - EM BATT 30W 150W-240W White
EMHB60 - EM BATT 60W 500W White
EMHB30/LCB - EM BATT 30W 150W-240W White with Lightcloud® Blue
EMHB60/LCB - EM BATT 60W 500W White with Lightcloud® Blue

Washdowns



	SEAL®	WHALE™
Available Sizes	2', 4', 8'	2', 4'
Field-Adjustable CCT	✓	✓
Field-Adjustable Wattage	✓	✓
Standalone Sensors	PIR, MVS	PIR, MVS
Lightcloud®		Controller
Lightcloud® Blue	PIR, MVS	PIR, MVS
DLC Listing	Standard	Premium



SEAL®



Size	Catalog No.	CCT	Wattage	Equivalent	Max Lumens	Max Efficacy	Mt. Height
SMALL	SEAL2	3500K 4000K 5000K	25/15/10W	(2) F17T8	3,400	142	8 - 15'
MEDIUM	SEAL4	3500K 4000K 5000K	50/40/30W	(2) F32T8	6,800	142	8 - 20'
LARGE	SEAL8	3500K 4000K 5000K	100/80/60W	up to (6) F32T8 (3) F96T8	13,700	143	10 - 25'

White
Finishes



Mounting Accessories

Catalog No.

JBSEAL - Junction Box Bracket (2ft and 4ft models)

Catalog No.

ANGSEAL - Angled Bracket (2ft and 4ft models)

ANGSEAL8 - Angled Bracket (8ft models)

WHALE



2FT	WHALE2	3500K 4000K 5000K	90/75/60W	(6) F32T8	14,327	166	10 - 20'
	WHALE2H	3500K 4000K 5000K	135/100/70W	(8) F32T8	19,460	163	10 - 25'
4FT	WHALE4	3500K 4000K 5000K	160/140/120W	(10) F32T8	24,462	164	10 - 25'
	WHALE4H	3500K 4000K 5000K	265/225/145W	(18) F32T8	38,081	163	10 - 30'


White
Finishes



OPTIONS FOR SEAL AND WHALE

Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
Battery Backup	/E	Lightcloud® Blue PIR Sensor	/LCBS
Passive Infrared Occupancy Sensor	/PIR	Lightcloud® Blue MVS Sensor	/LCBS/MVS
Microwave Occupancy Sensor	/MVS	Lightcloud® Blue PIR Sensor w/ Battery Backup	/LCBS/E
Passive Infrared Occupancy Sensor w/ Battery Backup	/PIR/E	Lightcloud® Blue MVS Sensor w/ Battery Backup	/LCBS/MVS/E
Microwave Occupancy Sensor w/ Battery Backup	/MVS/E		

Strips & Wraps

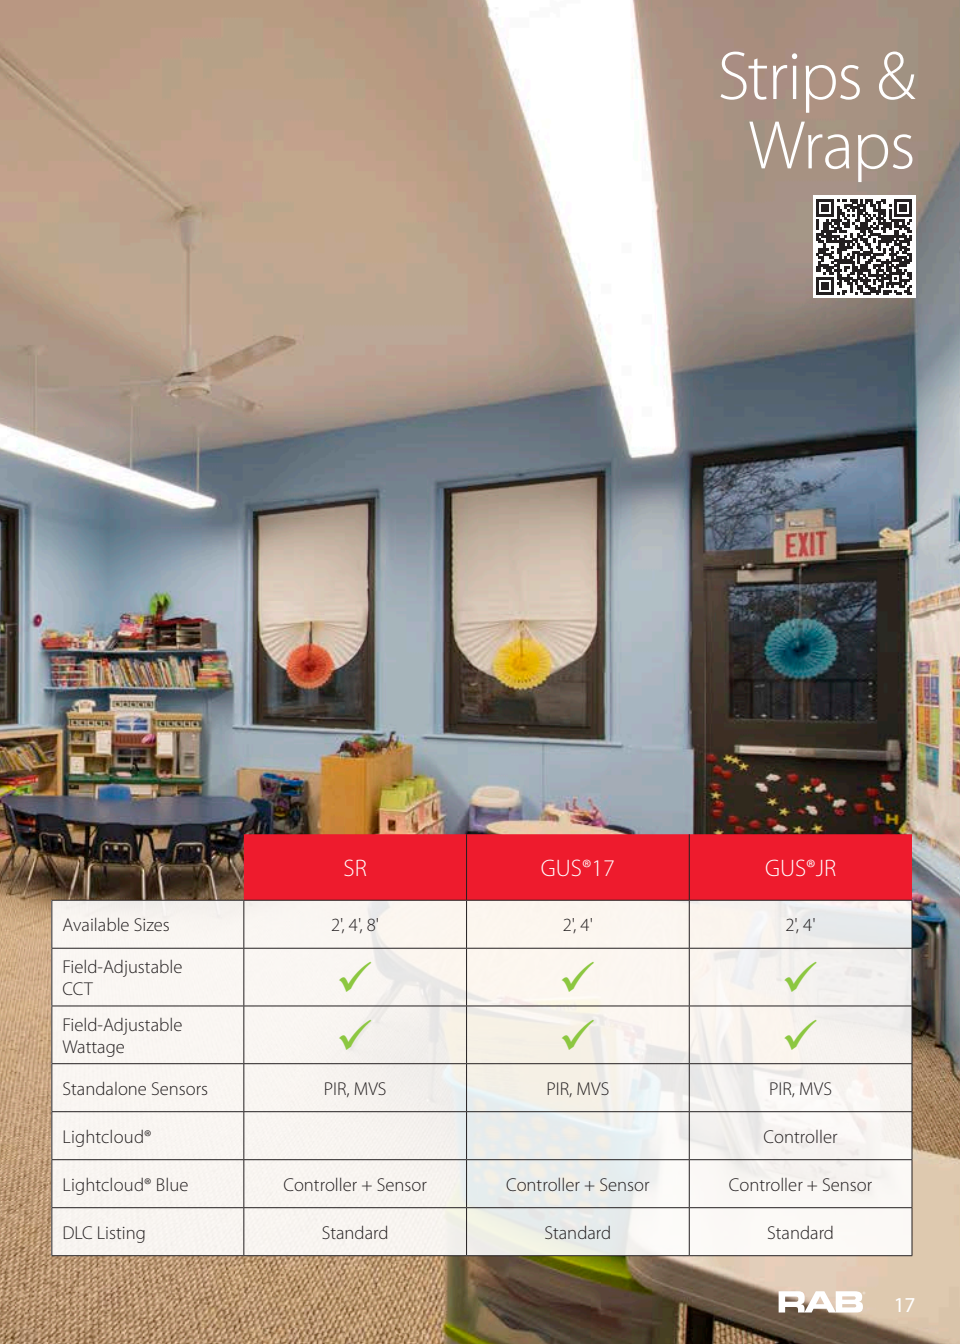

	SR	GUS®17	GUS®JR
Available Sizes	2', 4', 8'	2', 4'	2', 4'
Field-Adjustable CCT	✓	✓	✓
Field-Adjustable Wattage	✓	✓	✓
Standalone Sensors	PIR, MVS	PIR, MVS	PIR, MVS
Lightcloud®			Controller
Lightcloud® Blue	Controller + Sensor	Controller + Sensor	Controller + Sensor
DLC Listing	Standard	Standard	Standard



STRIPS & WRAPS

SR™



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
2 ft	SR2	 3500K 4000K 5000K	19/14/10W	(2) F17T8	2,998	161	8-12'
4 ft	SR4L	 3500K 4000K 5000K	28/21/14W	up to (2) F32T8	4,135	152	8-12'
	SR4	 3500K 4000K 5000K	40/30/20W	(2) F32T8	6,174	164	8-15'
8 ft	SR8	 3500K 4000K 5000K	60/50/40W	up to (6) F32T8 (3) F96T8	8,986	159	10-20'
	SR8H	 3500K 4000K 5000K	85/75/54W	up to (5) F32T8 or (3) F96T8	12,591	159	10-25'

White

Finishes



OPTIONS

Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
Battery Backup	/E	Lightcloud® Blue PIR Sensor	/LCBS
Passive Infrared Occupancy Sensor	/PIR	Lightcloud® Blue MVS Sensor	/LCBS/MVS
Microwave Occupancy Sensor	/MVS	Lightcloud® Blue PIR Sensor w/ Battery Backup	/LCBS/E
Passive Infrared Occupancy Sensor w/ Battery Backup	/PIR/E	Lightcloud® Blue MVS Sensor w/ Battery Backup	/LCBS/MVS/E
Microwave Occupancy Sensor w/ Battery Backup	/MVS/E		

GUS® 17



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
2 ft	GUS17-2	 3500K 4000K 5000K	25/15/10W	(1) F32T8 (3) F17T8	2,974	124	8-12'
4 ft	GUS17-4	 3500K 4000K 5000K	50/40/30W	(3) F32T8	5,873	128	10-15'

White
Finishes 



OPTIONS


Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
Battery Backup	/E	Lightcloud® Blue PIR Sensor	/LCBS
Passive Infrared Occupancy Sensor	/PIR	Lightcloud® Blue MVS Sensor	/LCBS/MVS
Microwave Occupancy Sensor	/MVS	Lightcloud® Blue PIR Sensor w/ Battery Backup	/LCBS/E
Passive Infrared Occupancy Sensor w/ Battery Backup	/PIR/E	Lightcloud® Blue MVS Sensor w/ Battery Backup	/LCBS/MVS/E
Microwave Occupancy Sensor w/ Battery Backup	/MVS/E		

Mounting Accessories

Catalog No.	Catalog No.
GUS17 VHOOK	GUS17 JOIN KIT
GUS17 2-V Hook, 2-40" Chains	GUS17 Join Kit w/Bracket/Nuts/Wire



GUS® JR



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
2 ft	GUSJR2	 3500K 4000K 5000K	20/15/10W	(2) F17T8	2,790	144	9-12'
4 ft	GUSJR4	 3500K 4000K 5000K	40/30/20W	(2) F32T8	5,540	150	9-12'

White

Finishes



OPTIONS

Adder

Battery Backup
Passive Infrared Occupancy Sensor
Microwave Occupancy Sensor
Passive Infrared Occupancy Sensor w/ Battery Backup
Microwave Occupancy Sensor w/ Battery Backup

Catalog No. Suffix

/E
/PIR
/MVS
/PIR/E
/MVS/E

Adder

Lightcloud® Blue PIR Sensor*
Lightcloud® Blue MVS Sensor*

Catalog No. Suffix

/LCBS
/LCBS/MVS

Mounting Accessories

Catalog No.

VHOOKGUSJR - V Hooks

Surface Mount & Downlights



	DSK34	DISK34	SUMO	SUMO34	PUCK
Type	DISK	DISK	Surface Mount	Surface Mount	Surface Mount
Available Sizes	4", 6"	4", 6"	5.5", 7", 9"	12", 15"	4"
Field-Adjustable CCT		✓	✓	✓	✓
CRI	90	90	90	90	90



DSK34



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Lumens ¹	Efficacy ¹
	4"	DSK34-4R12950120WS	● 5000K	12W	65W	750	63
		DSK34-4R12940120WS	● 4000K				
		DSK34-4R12935120WS	● 3500K				
		DSK34-4R12930120WS	● 3000K				
		DSK34-4R12927120WS	● 2700K	14W	75W	1,000	71
		DSK34-4R14940120WS	● 4000K				
		DSK34-4R14930120WS	● 3000K				
	6"	DSK34-6R16950120WS	● 5000K	16W	75W	1,140	63
		DSK34-6R16940120WS	● 4000K				
		DSK34-6R16935120WS	● 3500K				
		DSK34-6R16930120WS	● 3000K				
		DSK34-6R16927120WS	● 2700K	16.5W	75W	1,200	73
		DSK34-6R16.5940120WS	● 4000K				
DSK34-6R16.5930120WS		● 3000K					
Finishes		White	Black	Bronze	Brushed Nickel		
							
		2  					

1. Numbers are nominal. 2. 5000K models are not T24 compliant.



Mounting Accessories

Catalog No.

DSK34-4/ACC - 4" DSK34 E26 Accessory Kit

DSK34-6/ACC - 6" DSK34 E26 Accessory Kit

DISK34



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹
	4"	DISK34-4	 2700K 3000K 3500K 4000K 5000K	10W	60W	763	77
	6"	DISK34-6	 2700K 3000K 3500K 4000K 5000K	15W	75W	1,132	77

Finishes

White  Black  Bronze  Brushed Nickel 



1. Numbers are nominal. 2. 5000K models are not T24 compliant.

Trim Accessories

Catalog No.

DISK34-TRIM-4-BRZ - 4" Bronze Color Trim
DISK34-TRIM-4-BN - 4" Brushed Nickel Color Trim
DISK34-TRIM-4-BLK - 4" Black Color Trim

Catalog No.

DISK34-TRIM-6-BRZ - 6" Bronze Color Trim
DISK34-TRIM-6-BN - 6" Brushed Nickel Color Trim
DISK34-TRIM-6-BLK - 6" Black Color Trim

SUMO34



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹
	12"	SUMO34-R-12	 2700K 3000K 3500K 4000K 5000K	13W	75W INC	1,013	70
	15"	SUMO34-R-15	 2700K 3000K 3500K 4000K 5000K	17W	100W INC	1,385	70

Finish

White 



1. Numbers are nominal



SURFACE MOUNT

SUMO



5-Year,
No Compromise



FIELD ADJ.



50,000 HRS



TRIAC



NO HOUSING
REQUIRED



120V

CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹
	5.5"	SUMO-R-5	2700K 3000K 3500K 4000K 5000K	10W	40W	650	65
		SUMO-S-5	2700K 3000K 3500K 4000K 5000K			600	60
	7"	SUMO-R-7	2700K 3000K 3500K 4000K 5000K	14W	60W	900	64
		SUMO-S-7	2700K 3000K 3500K 4000K 5000K			850	61
	9"	SUMO-R-9	2700K 3000K 3500K 4000K 5000K	18W	75W	1,150	64
		SUMO-S-9	2700K 3000K 3500K 4000K 5000K			1,100	61

Finishes

White Black Bronze Brushed Nickel



1. Numbers are nominal

Trim Accessories

Catalog No.

5" Color Trim

SUMO-TRIM-R-5-BLK - Black trim, round

SUMO-TRIM-R-5-BN - Brushed nickel, round

SUMO-TRIM-R-5-BRZ - Bronze trim, round

Catalog No.

7" Color Trim

SUMO-TRIM-R-7-BLK - Black trim, round

SUMO-TRIM-R-7-BN - Brushed nickel, round

SUMO-TRIM-R-7-BRZ - Bronze trim, round

Catalog No.

9" Color Trim

SUMO-TRIM-R-9-BLK - Black trim, round

SUMO-TRIM-R-9-BN - Brushed nickel, round

SUMO-TRIM-R-9-BRZ - Bronze trim, round

PUCK



5-Year,
No Compromise



FIELD ADJ.



50,000 HRS



TRIAC



120V

CRI	Size	Catalog No.	CCT	Wattage	Equivalent ¹	Max. Lumens ²	Max. Efficacy ²
	4"	PUCKFA-4R-7.5-9CCT-120-WS	2700K 3000K 3500K 4000K 5000K	7.5W	40W	650	87

Finishes

White Black Bronze Brushed Nickel



Trim Accessories

Catalog No.

PUCKFA-TRIM-4R-BNS - Magnetic color trim, brushed nickel

PUCKFA-TRIM-4R-BS - Magnetic color trim, black

PUCKFA-TRIM-4R-BRS - Magnetic color trim, bronze

CURV



CRI	Type	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Voltage
	PUFF	11"	CRVFAS-11R-16-9CCT-120-W	 2700K 3000K 3500K 4000K 5000K	16W	75W INC	1,150	72	120
			CRVFAS-11R-16-9CCT-UNV-W					76	120-277
		14"	CRVFAS-14R-20-9CCT-120-W	 2700K 3000K 3500K 4000K 5000K	20W	125W INC	1,500	75	120
			CRVFAS-14R-20-9CCT-UNV-W					75	120-277
		19"	CRVFAS-19R-32-9CCT-120-W	 2700K 3000K 3500K 4000K 5000K	32W	150W INC	2,450	77	120
			CRVFAS-19R-32-9CCT-UNV-W					75	120-277
	DECO RING	12"	CRVFAD-12R-16-9CCT-120-BN	 2700K 3000K 3500K 4000K 5000K	16W	75W INC	1,100	69	120
			CRVFAD-12R-16-9CCT-UNV-BN					79	120-277
		14"	CRVFAD-14R-20-9CCT-120-BN	 2700K 3000K 3500K 4000K 5000K	20W	125W INC	1,400	70	120
			CRVFAD-14R-20-9CCT-UNV-BN					70	120-277
		18"	CRVFAD-18R-32-9CCT-120-BN	 2700K 3000K 3500K 4000K 5000K	32W	150W INC	2,200	69	120
			CRVFAD-18R-32-9CCT-UNV-BN					70	120-277

Finishes  White  Brushed Nickel



1. Numbers are nominal.

OPTIONS

Adder	Catalog No. Suffix
Microwave Occupancy Sensor	/MVS ¹
Microwave Occupancy Sensor w/ Battery Backup	/MVS/EM ¹
Battery Backup	/EM ¹
Battery Backup	/EMBB ²

1. MVS sensor only available on 120-277V 0-10V units. 2. Emergency backup only available on 120-277V TRIAC units

Mounting Accessories

Catalog No.

CRVFA-CONVERTIBLE-KIT - 4-12" Pendant mount brushed nickel

Sensor Accessories

Catalog No.

MSR1 - Remote Control for Microwave Sensor


Emergency Driver - Field Install

Catalog No.

DRI-25-EMGR-DC - Emergency driver 25W

DRI-21-EMGR-DC-D10 - Emergency driver 21W T20 compliant

Downlight Retrofits

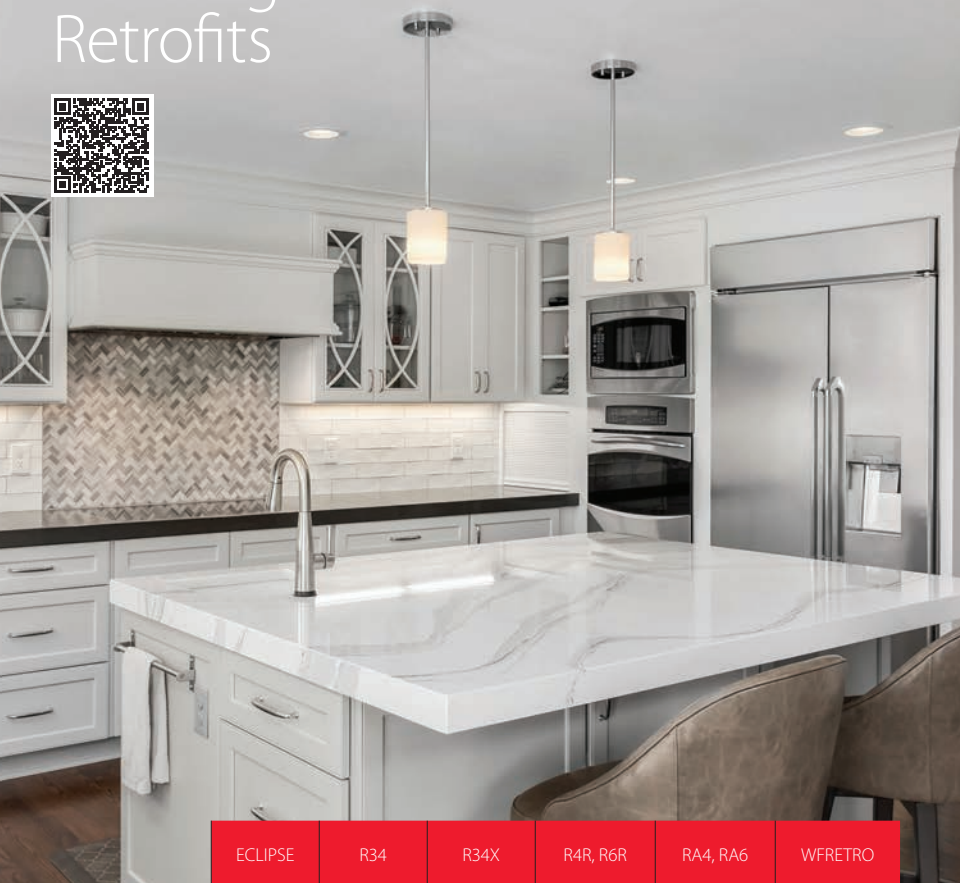

	ECLIPSE	R34	R34X	R4R, R6R	RA4, RA6	WFRETRO
Feature	Nightlight	Plastic Trim	Metal Trim	Metal Trim	Metal Trim	Slim
Available Sizes	4", 6"	4", 6"	4", 6"	4", 6"	4", 6"	4", 6"
Field-Adjustable CCT	✓	✓	✓	✓	✓	✓
Field-Adjustable Wattage			✓			✓
Trim	Smooth & Baffle	Smooth & Baffle	Smooth & Baffle	Smooth & Baffle	Adjustable Gimbal	Smooth & Baffle

ECLIPSE NIGHTLIGHT



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	ECLPS-4 ECLPS-4B	 2700K 3000K 3500K 4000K 5000K	7.5W	40W INC	650	93	110°
	6"	ECLPS-6 ECLPS-6B	 2700K 3000K 3500K 4000K 5000K	9.5W	60W INC	1,000	90	110°

Finishes **White**



1. Numbers are nominal.

Mounting Accessories

4" & 6" Housing

Catalog No.

NDCANIC4R - 4" New Construction IC Rated Housing

RDCANIC4R - 4" Remodeler IC Rated Housing

NDCANIC6R - 6" New Construction IC Rated Housing

RDCANIC6R - 6" Remodeler IC Rated Housing



R34, PLASTIC TRIM



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	R34-4	2700K 3000K 3500K 4000K 5000K	7.5W	60W INC	700	93	110°
		R34-4B						
	6"	R34-6	2700K 3000K 3500K 4000K 5000K	10W	75W INC	900	90	110°
		R34-6B						

R34S, PLASTIC TRIM



	4"	R34S-4	2700K 3000K 3500K 4000K 5000K	7.5W	60W INC	700	93	110°
		R34S-4B						
	6"	R34S-6	2700K 3000K 3500K 4000K 5000K	10W	75W INC	900	90	110°
		R34S-6B						

Finishes **White**



1. Numbers are nominal.

Mounting Accessories

4" & 6" Housing

Catalog No.

NDCANIC4R - 4" New Construction
IC Rated Housing

RDCANIC4R - 4" Remodeler
IC Rated Housing

NDCANIC6R - 6" New Construction
IC Rated Housing

RDCANIC6R - 6" Remodeler
IC Rated Housing

Trim Accessories

Catalog No.

4" Smooth Color Trim

DLTRIM/R4RS-B-L - Black trim, round

DLTRIM/R4RS-BN-L - Brushed nickel, round

DLTRIM/R4RS-BRZ-L - Bronze trim, round

4" Baffle Color Trim

DLTRIM/R4RB-B-L - Black trim, round

DLTRIM/R4RB-BN-L - Brushed nickel, round

DLTRIM/R4RB-BRZ-L - Bronze trim, round

Catalog No.

6" Smooth Color Trim

DLTRIM/R6RS-B - Black trim, round

DLTRIM/R6RS-BN - Brushed nickel, round

DLTRIM/R6RS-BRZ - Bronze trim, round

6" Baffle Color Trim

DLTRIM/R6RB-B - Black trim, round

DLTRIM/R6RB-BN - Brushed nickel, round

DLTRIM/R6RB-BRZ - Bronze trim, round

5/6" Retroband

Catalog No.

RFLED-RETROBAND - 6" only, Convert 5/6" Trim to be compatible with Friction Clip downlight housings

R4R, R6R METAL TRIM



CRI	Size	Catalog No. ¹	CCT	Wattage	Equivalent	Max. Lumens ²	Max. Efficacy ²	Beam Angle	
	4"	R4R89FA120Wx		2700K 3000K 3500K 4000K 5000K	8W	65W INC	700	88	110°
		R4R109FA120Wx		10W	75W INC	1,000	100	110°	
	6"	R6R89FA120Wx		2700K 3000K 3500K 4000K 5000K	8W	65W INC	725	91	110°
		R6R119FA120Wx		11W	75W INC	900	82	110°	
		R6R149FA120Wx		14W	100W INC	1,200	86	110°	

Finishes

White















1. X in the catalog number represents (S) smooth, (B) baffle. 2. Numbers are nominal.

Mounting Accessories

4" & 6" Housing

Catalog No.

NDCANIC4R - 4" New Construction IC Rated Housing

RDCANIC4R - 4" Remodeler IC Rated Housing

NDCANIC6R - 6" New Construction IC Rated Housing

RDCANIC6R - 6" Remodeler IC Rated Housing

Goof Rings

Catalog No. RFLED-GOOF-6R-8R-W - 4"- 6", 6" - 8"

Goof ring round white

5/6" Retroband

Catalog No. RFLED-RETROBAND - 6" only,

Retrofit band with friction clips

Trim Accessories

Catalog No.

4" Smooth Color Trim

DLTRIM/R4RS-B-L - Black trim, round

DLTRIM/R4RS-BN-L - Brushed nickel, round

DLTRIM/R4RS-BRZ-L - Bronze trim, round

4" Baffle Color Trim

DLTRIM/R4RB-B-L - Black trim, round

DLTRIM/R4RB-BN-L - Brushed nickel, round

DLTRIM/R4RB-BRZ-L - Bronze trim, round

6" Smooth Color Trim

DLTRIM/R6RS-B - Black trim, round

DLTRIM/R6RS-BN - Brushed nickel, round

DLTRIM/R6RS-BRZ - Bronze trim, round

6" Baffle Color Trim

DLTRIM/R6RB-B - Black trim, round

DLTRIM/R6RB-BN - Brushed nickel, round

DLTRIM/R6RB-BRZ - Bronze trim, round



RA4, RA6 ADJUSTABLE GIMBAL



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	RA4R89FA120WS	 2700K 3000K 3500K 4000K 5000K	8W	65W INC	700	88	95°
	5/6"	RA6R109FA120WS	 2700K 3000K 3500K 4000K 5000K	10W	75W INC	900	90	95°
		RA6R119FA120WS	 2700K 3000K 3500K 4000K 5000K	11W	100W INC	1,100	100	95°
White  Finishes  SMOOTH  BAFFLE  ADJUSTABLE  ENERGY STAR  2019 ENERGY STAR 24 HOURS  CALIFORNIA TITLE 20 COMPLIANT  DAMP RATED  FCC COMPLIANT								

1. Numbers are nominal.

Mounting Accessories

4" & 6" Housing

Catalog No.

NDCANIC4R - 4" New Construction IC Rated Housing

RDCANIC4R - 4" Remodeler IC Rated Housing

NDCANIC6R - 6" New Construction IC Rated Housing

RDCANIC6R - 6" Remodeler IC Rated Housing

5/6" Retroband

Catalog No.

RFLED-RETROBAND - 6" only, Retrofit band with friction clips

R34X, METAL TRIM



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	R34X-4	2700K 3000K 3500K 4000K 5000K	7/6.5W	65W INC	700	100	85°
		R34X-4B						
	6"	R34X-6	2700K 3000K 3500K 4000K 5000K	14/11/7.5W	100W INC	1,300	93	85°
		R34X-6B						

Finishes **White**



1. Numbers are nominal.

Mounting Accessories

4" & 6" Housing

Catalog No.

NDCANIC4R - 4" New Construction IC Rated Housing

RDCANIC4R - 4" Remodeler IC Rated Housing

NDCANIC6R - 6" New Construction IC Rated Housing

RDCANIC6R - 6" Remodeler IC Rated Housing



WAFER RETROFIT



5-Year,
No Compromise



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Beam Angle
	4"	WFRETRO4	 2700K 3000K 3500K 4000K 5000K	10/8/6W	60W INC	625	100	110°
		WFRETRO4B	 2700K 3000K 3500K 4000K 5000K			920	93	110°
	6"	WFRETRO6	 2700K 3000K 3500K 4000K 5000K	15/13/11W	100W INC	1,430	106	110°
		WFRETRO6B	 2700K 3000K 3500K 4000K 5000K			1,421	101	110°
Finishes  White  SMOOTH  BAFFLE  ENERGY STAR  2019 TITLE 24 COMPLIANT  2020 TITLE 24 COMPLIANT  WET RATED  IC RATED  AIRTIGHT  FC COMPLIANT								

Mounting Accessories

4" & 6" Housing

Catalog No.

NDCANIC4R - 4" New Construction IC Rated Housing

RDCANIC4R - 4" Remodeler IC Rated Housing

NDCANIC6R - 6" New Construction IC Rated Housing

RDCANIC6R - 6" Remodeler IC Rated Housing

Canless Downlights



	ORB	WAVER17	WFRL	WFD	WFRLA	DAISY
Type	Residential Canless	Residential Canless	Residential Canless	Residential Canless	Residential Canless	Residential Canless
Available Sizes	4", 6"	4", 6"	3", 4", 5", 6", 8"	4", 6"	4", 6"	4", 6"
Field-Adjustable CCT	✓	✓	✓	✓	✓	✓
CRI	90	90	90	90	90	90

	FWAVER	FGIMBAL	R3	CR	CRX	WFRL
Type	Fire Resistant	Fire Resistant	Residential Canless	Commercial Canless	Commercial Canless	Commercial Canless
Available Sizes	4", 6"	4", 6"	2"	4", 6", 8", 10"	3", 4", 6", 8"	4", 6"
Field-Adjustable CCT	✓	✓	✓	✓	✓	✓
Field-Adjustable Wattage				✓	✓	
CRI	90	90	90	90	90	90



RESIDENTIAL CANLESS DOWNLIGHTS

ORB



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Beam Angle
	4"	ORB4	2700K 3000K 3500K 4000K 5000K	9W	60W INC	828	94	110°
	6"	ORB6	2700K 3000K 3500K 4000K 5000K	13W	75W INC	1,114	90	110°

Finishes



Mounting Accessories

Mounting Plates

Catalog No.

- DLPLATE/WFR4 - Wafer mounting plate w/o nailer
- DLPLATE/WFR6 - Wafer mounting plate w/o nailer
- DLPLATE/WFR4/NB/CL - Mounting plate for wafer 4" w/drywall collar & extensions bar
- DLPLATE/WFR6/NB/CL - Mounting plate for wafer 6" w/drywall collar & extensions bar
- DLPLATE/WFR3456 - DL eco mounting plate grey for wafer 3 7/4" 5" 6"
- DLPLATE/WFR3468/NB - Mounting Plate with nailer bar for wafer 3 7/4" 6" 8"

Accessories

Extension Cables

Catalog No.

- EXTCBL-CCT-6 - 6 ft extension cable for wafer CCT
- EXTCBL-CCT-12 - 12 ft extension cable for wafer CCT
- EXTCBL-CCT-20 - 20 ft extension cable for wafer CCT

Emergency Driver

Catalog No.

- DRI-21-EMGR-DC - Emergency driver 100-277V, 25W
- DRI-21-EMGR-DC-D10 - Emergency driver 100-277V 0-10 DIM, 21W
- EMBB-12-1248-DC - Recessed downlights emergency battery 12W 12-48V DC Current

WAFER17



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	WFR17-4	 2700K 3000K 3500K 4000K 5000K	9W	60W INC	650	67	110°
		WFR17-B						
	6"	WFR17-6	 2700K 3000K 3500K 4000K 5000K	13W	75W INC	1,000	69	110°
		WFR17-6B						
Finishes  White  Black  Bronze  Brushed Nickel  SMOOTH  BAFFLE  2019 IESNA 24  WET RATED  FCC COMPLIANT  IC RATED  ARTIGHT								

1. Numbers are nominal.

Mounting Accessories

Goof Rings

Catalog No.

WFR1-GOOF-4R-6R-W - 4" Goof ring round white

WFR1-GOOF-6R-8R-W - 6" Goof ring round white

Universal Driver

Catalog No.

HAD4/D10- 120-277V Driver

Extension Cables

Catalog No.

EXTCBL-FA-6 - 6 ft extension cable

EXTCBL-FA-12- 12 ft extension cable

EXTCBL-FA-20- 20 ft extension cable

Mounting Plates

Catalog No.

DLPLATE/WFR3468/NB - Mounting Plate with nailer bar

DLPLATE/WFR3456 - Mounting plate

DLPLATE/WFR4/NB/CL - 4" Mounting plate with nailer bar and collar

DLPLATE/WFR6/NB/CL - 6" Mounting plate with nailer bar and collar

Accessories

Catalog No.

4" Smooth Color Trim

WFR1-TRIM-4R-B5 - Black trim, round

WFR1-TRIM-4R-BRS - Brushed nickel, round

WFR1-TRIM-4R-BNS - Bronze trim, round

6" Smooth Color Trim

WFR1-TRIM-6R-B5 - Black trim, round

WFR1-TRIM-6R-BRS - Brushed nickel, round

WFR1-TRIM-6R-BNS - Bronze trim, round



RESIDENTIAL CANLESS DOWNLIGHTS

WFRL EDGE-LIT WAFER



CRI	Size	Catalog No. ¹	CCT	Wattage	Equivalent	Max. Lumens ²	Max. Efficacy ²	Beam Angle
	3"	WFRL3R69CCT120Wx	 2700K 3000K 3500K 4000K 5000K	6W	40W INC	420	100	110°
	4"	WFRL4R99FA120Wx	 2700K 3000K 3500K 4000K 5000K	9W	60W INC	680	76	110°
		WFRL4R10.59FA120Wx	 2700K 3000K 3500K 4000K 5000K	10.5W	60W INC	800	76	110°
	5"	WFRL5R129CCT120Wx	 2700K 3000K 3500K 4000K 5000K	12W	65W INC	900	75	110°
	6"	WFRL6R139FA120Wx	 2700K 3000K 3500K 4000K 5000K	13W	75W INC	1,050	81	110°
		WFRL6R149FA120Wx	 2700K 3000K 3500K 4000K 5000K	14W	75W INC	1,200	86	110°
	8"	WFRL8R239FA120Wx	 2700K 3000K 3500K 4000K 5000K	23W	150W INC	1,800	78	110°
Finishes  White  Black  Bronze  Brushed Nickel  SMOOTH  BAFFLE  ENERGY STAR  2019 TITLE 24  WET RATED  FCC COMPLIANT  IC RATED  AIRTIGHT								

1. X in the catalog number represents (S) smooth, (B) baffle, (BS) shallow baffle. 2. Numbers are nominal.

Mounting Accessories

Goof Rings

Catalog No.

WFRL-GOOF-4R-6R-W - 4" Goof ring round white

WFRL-GOOF-6R-8R-W - 6" Goof ring round white

Universal Driver

Catalog No.

HAD4/D10 - 120-277V Driver

Extension Cables

Catalog No.

EXTCBL-FA-6 - 6 ft extension cable

EXTCBL-FA-12 - 12 ft extension cable

EXTCBL-FA-20 - 20 ft extension cable

Accessories

Catalog No.

3" Smooth Color Trim

WFRL-TRIM-3R-BS - Black trim, round

WFRL-TRIM-3R-BRS - Brushed nickel, round

WFRL-TRIM-3R-BNS - Bronze trim, round

4" Smooth Color Trim

WFRL-TRIM-4R-BS - Black trim, round

WFRL-TRIM-4R-BRS - Brushed nickel, round

WFRL-TRIM-4R-BNS - Bronze trim, round

6" Smooth Color Trim

WFRL-TRIM-6R-BS - Black trim, round

WFRL-TRIM-6R-BRS - Brushed nickel, round

WFRL-TRIM-6R-BNS - Bronze trim, round

GIMBAL WAFER



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	WFRLA4R89FA120WS	 2700K 3000K 3500K 4000K 5000K	8W	60W INC	650	81	110°
	6"	WFRLA6R129FA120WS	 2700K 3000K 3500K 4000K 5000K	12W	75W INC	950	79	110°
Finishes  White       								

1. Numbers are nominal.

Mounting Accessories

Goof Rings

Catalog No.

WFRL-GOOF-4R-6R-W - 4"- 6" Goof ring round white

WFRL-GOOF-6R-8R-W - 6"- 8" Goof ring round white

Universal Driver

Catalog No. HAD4/D10- 120-277V Driver

Extension Cables

Catalog No.

EXTCBL-FA-6 - 6 ft extension cable

EXTCBL-FA-12 - 12 ft extension cable

EXTCBL-FA-20 - 20 ft extension cable

Accessories

Emergency Driver

Catalog No.

DRI-25-EMGR-DC - Emergency driver 25W.

DRI-21-EMGR-DC-D10 - Emergency driver 21W
T20 compliant.



RESIDENTIAL CANLESS DOWNLIGHTS

WFD RECESSED DOWNLIGHT



5-Year,
No Compromise



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	WFD4	 2700K 3000K 3500K 4000K 5000K	13W	100W INC	1,200	92	110°
		WFD4B	 2700K 3000K 3500K 4000K 5000K	13W	100W INC	1,200	92	110°
	6"	WFD6	 2700K 3000K 3500K 4000K 5000K	15W	120W INC	1,500	100	110°
		WFD6B	 2700K 3000K 3500K 4000K 5000K	15W	120W INC	1,500	100	110°
Finishes	 White  ENERGY STAR  24 HRS.  WET RATED  FCC COMPLIANT  IC RATED  UL LISTED							

1. Numbers are nominal.

Mounting Accessories

Extension Cables

Catalog No.

EXTCBL-FA-6 - 6 ft extension cable

EXTCBL-FA-12 - 12 ft extension cable

EXTCBL-FA-20 - 20 ft extension cable

Emergency Driver

Catalog No.

DRI-25-EMGR-DC - Emergency driver 25W.

DRI-21-EMGR-DC-D10 - Emergency driver 21W

T20 compliant.

Accessories

Goof Rings

Catalog No.

RFLED-GOOF-6R-8R-W - 6"- 8" Goof ring round white

Universal Driver

Catalog No.

HAD4/D10 - 120-277V Driver

Extension Cables


Catalog No.

EXTCBL-FA-6 - 6 ft extension cable

EXTCBL-FA-12 - 12 ft extension cable

EXTCBL-FA-20 - 20 ft extension cable

DAISY CHAIN WAFER



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	DAISYKIT4120V	 2700K 3000K 3500K 4000K 5000K	55W	(6) 60W INC	4,550	83	110°
	6"	DAISYKIT6120V	 2700K 3000K 3500K 4000K 5000K	74W	(6) 75W INC	6,100	82	110°
Finishes 			     					

1. Numbers are nominal. *Apply to daisy wafer kit only.

Mounting Accessories

Goof Rings

Catalog No.

WFRL-GOOF-4R-6R-W - 4" Goof ring round white

WFRL-GOOF-6R-8R-W - 6" Goof ring round white

Extension Cables

Catalog No.

DAISY50 - Daisy Driver 50 ft Extension Cable

EXTCBL-CCT-6 - 6 ft extension cable for wafer CCT

EXTCBL-CCT-12 - 12 ft extension cable for wafer CCT

EXTCBL-CCT-20 - 20 ft extension cable for wafer CCT

Mounting Plates

Catalog No.

DLPLATE/WFR3468/NB - Mounting Plate with nailer bar for wafer 3 7/4"/6 7/8"

DLPLATE/WFR4/NB/CL - Mounting plate for wafer 4" w/drywall collar & extensions bar

DLPLATE/WFR6/NB/CL - Mounting plate for wafer 6" w/drywall collar & extensions bar

DLPLATE/WFR3456 - Mounting plate for wafer 3 7/4"/5 7/6"

DLPLATE/WFR4 - Wafer mounting plate w/o nailer

DLPLATE/WFR6 - Wafer mounting plate w/o nailer

Accessories

Catalog No.

Individual LED Downlight Modules

DAISY4 - 4" Smooth

DAISY6 - 6" Smooth

DAISY4B - 4" Baffle

DAISY6B - 6" Baffle

Catalog No.

4" Downlight

WFRL-TRIM-4R-BS - Black trim, round

WFRL-TRIM-4R-BRS - Brushed nickel, round

WFRL-TRIM-4R-BNS - Bronze trim, round

6" Downlight

WFRL-TRIM-6R-BS - Black trim, round

WFRL-TRIM-6R-BRS - Brushed nickel, round

WFRL-TRIM-6R-BNS - Bronze trim, round

Individual Driver

Catalog No.

DAISYDRIVER/D10 - 120-277V Driver

DAISYDRIVER/TRIAC - 120-277V Driver

Emergency Driver

Catalog No.

DRI-21-EMGR-DC-D10 - Emergency driver 21W

T20 compliant.



FIRE-RESISTANT WAFER



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹
	4"	FWAFER4	 2700K 3000K 3500K 4000K 5000K	11W	60W INC	900	92
		FWAFER4B	 2700K 3000K 3500K 4000K 5000K	11W	60W INC	900	92
	6"	FWAFER6	 2700K 3000K 3500K 4000K 5000K	15W	75W INC	1,250	83
		FWAFER6B	 2700K 3000K 3500K 4000K 5000K	15W	75W INC	1,250	83

White 

Finishes        

1. Numbers are nominal.

Mounting Accessories

Extension Cables

Catalog No.

EXTCBL-FA-6 - 6 ft extension cable

EXTCBL-FA-12 - 12 ft extension cable

EXTCBL-FA-20 - 20 ft extension cable

Accessories

Goof Rings

Catalog No.

WFRL-GOOF-4R-6R-W - 4"- 6" Goof ring round white

WFRL-GOOF-6R-8R-W - 6"- 8" Goof ring round white

Emergency Driver

Catalog No.

DRI-25-EMGR-DC - Emergency driver 25W.

DRI-21-EMGR-DC-D10 - Emergency driver 21W

T20 compliant.

FIRE-RESISTANT GIMBAL



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	FGIMBAL4	 2700K 3000K 3500K 4000K 5000K	9W	60W INC	750	93	110°
	6"	FGIMBAL6	 2700K 3000K 3500K 4000K 5000K	14W	75W INC	1,300	101	110°
Finishes  White        								

1. Numbers are nominal.

Mounting Accessories

Mounting Plates

Catalog No.

- DLPLATE/WFR3468/NB - Mounting Plate with nailer bar
- DLPLATE/WFR3456 - Mounting plate
- DLPLATE/WFR4/NB/CL - 4" Mounting plate with nailer bar and collar
- DLPLATE/WFR6/NB/CL - 6" Mounting plate with nailer bar and collar
- DLPLATE/WFR4 - 4" Mounting plate w/o nailer
- DLPLATE/WFR6 - 6" Mounting plate w/o nailer

Accessories

Extension Cables

Catalog No.

- EXTCBL-FA-6 - 6 ft extension cable
- EXTCBL-FA-12 - 12 ft extension cable
- EXTCBL-FA-20 - 20 ft extension cable

Emergency Driver

Catalog No.

- DRI-21-EMGR-DC-D10 - Emergency driver 21W
T20 compliant.

RECESSED 2"



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	2"	R3-9		9W	65W INC	650	72	38°
		R3-9B		9W	65W INC	650	72	38°
		R3S-9B		9W	65W INC	650	72	38°
		R3-15		15W	75W INC	1,000	67	38°
		R3-15B		15W	75W INC	1,000	67	38°
		R3S-15B		15W	75W INC	1,000	67	38°

Finishes 



1. Numbers are nominal.

CR FIELD ADJUSTABLE



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	4"	CR4	 2700K 3000K 3500K 4000K 5000K	10/8/6W	23W CFL	1,000	100	90°
	6"	CR6	 2700K 3000K 3500K 4000K 5000K	21/17/10W	52W CFL	2,300	110	90°
	8"	CR8	 2700K 3000K 3500K 4000K 5000K	30/24/16W	75W CFL	3,400	113	90°
	10"	CR10	 2700K 3000K 3500K 4000K 5000K	37/30/24W	100W CFL	4,200	114	90°
Finishes    								
      								

1. Numbers are nominal.

Mounting Accessories

Goof Rings

Catalog No.

DL4-6GOOF/R/P/CRLEDFA - Commercial Downlight 4"-6" Goof Ring
 DL6-8GOOF/R/P/CRLEDFA - Commercial Downlight 6"-8" Goof Ring
 DL8-10GOOF/R/P/CRLEDFA - Commercial Downlight 8"-10" Goof Ring
 DL8-12GOOF/R/P/CRLEDFA - Commercial Downlight 8"-12" Goof Ring
 DL10-12GOOF/R/P/CRLEDFA - Commercial Downlight 10"-12" Goof Ring

Mounting Frames

Catalog No.

DLFRAME/C6R - Commercial DL Frame 6"
 DLFRAME/C8R - Commercial DL Frame 8"

Mounting Plates

Catalog No.

DLPLATE/WFR3456 - Mounting plate for wafer 3"/4"/5"/6"
 DLPLATE/WFR4/NB/CL - Mounting plate for wafer 4"
 w/drywall collar & extensions bar
 DLPLATE/WFR6/NB/CL - Mounting plate for wafer 6"
 w/drywall collar & extensions bar
 DLPLATE/WFR3468/NB - Mounting Plate with nailer bar for 4"/6"
 DLPLATE/C3468/NB - Mounting Plate with nailer bar for 6"/8"/10"

Trim Accessories

Catalog No.

4" Smooth Color Trim

DLTRIM/CRLEDFA4R-B5 - 4" Black Color Trim
 DLTRIM/CRLEDFA4R-BNS - 4" Brushed Nickel Color Trim
 DLTRIM/CRLEDFA4R-BRS - 4" Black Color Trim

6" Smooth Color Trim

DLTRIM/CRLEDFA6R-B5 - 6" Black Color Trim
 DLTRIM/CRLEDFA6R-BNS - 6" Brushed Nickel Color Trim
 DLTRIM/CRLEDFA6R-BRS - 6" Black Color Trim

8" Smooth Color Trim

DLTRIM/CRLEDFA8R-B5 - 8" Black Color Trim
 DLTRIM/CRLEDFA8R-BNS - 8" Brushed Nickel Color Trim
 DLTRIM/CRLEDFA8R-BRS - 8" Black Color Trim

10" Smooth Color Trim

DLTRIM/CRLEDFA10R-B5 - 10" Black Color Trim
 DLTRIM/CRLEDFA10R-BNS - 10" Brushed Nickel Color Trim
 DLTRIM/CRLEDFA10R-BRS - 10" Black Color Trim



CRX FIELD ADJUSTABLE



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	3"	CRX3	 2700K 3000K 3500K 4000K 5000K	15/12/9W	40W CFL	1,500	100	90°
	4"	CRX4	 2700K 3000K 3500K 4000K 5000K	20/16/12W	52W CFL	2,000	100	90°
	6"	CRX6	 2700K 3000K 3500K 4000K 5000K	50/40/30W	125W CFL	5,000	100	90°
	8"	CRX8/D10	 2700K 3000K 3500K 4000K 5000K	80/65/50W	200W CFL	8,000	100	90°

Finishes	White	Black	Bronze	Brushed Nickel



1. Numbers are nominal.

Mounting Accessories

Goof Rings

Catalog No.

DL4-6GOOF/R/P/CRLEDFA - Commercial Downlight 4"-6" Goof Ring
 DL6-8GOOF/R/P/CRLEDFA - Commercial Downlight 6"-8" Goof Ring
 DL8-10GOOF/R/P/CRLEDFA - Commercial Downlight 8"-10" Goof Ring
 DL8-12GOOF/R/P/CRLEDFA - Commercial Downlight 8"-12" Goof Ring

Mounting Plates

Catalog No.

DLPLATE/WFR4 - Mounting plate for wafer 4"
 DLPLATE/WFR4/NB/CL - Mounting plate for wafer 4" w/drywall collar & extensions bar
 DLPLATE/WFR6 - Mounting plate for wafer 6"
 DLPLATE/WFR6/NB/CL - Mounting plate for wafer 6" w/drywall collar & extensions bar
 DLPLATE/WFR3456 - Mounting plate for wafer 3"/4"/5"/6"
 DLPLATE/WFR3468/NB - Mounting Plate with nailer bar for 3"/4"/6"/8"

Trim Accessories

Catalog No.

4" Smooth Color Trim

DLTRIM/CRLEDFA4R-B5 - 4" Black Color Trim
 DLTRIM/CRLEDFA4R-BNS - 4" Brushed Nickel Color Trim
 DLTRIM/CRLEDFA4R-BRS - 4" Black Color Trim

6" Smooth Color Trim

DLTRIM/CRLEDFA6R-B5 - 6" Black Color Trim
 DLTRIM/CRLEDFA6R-BNS - 6" Brushed Nickel Color Trim
 DLTRIM/CRLEDFA6R-BRS - 6" Black Color Trim

8" Smooth Color Trim

DLTRIM/CRLEDFA8R-B5 - 8" Black Color Trim
 DLTRIM/CRLEDFA8R-BNS - 8" Brushed Nickel Color Trim
 DLTRIM/CRLEDFA8R-BRS - 8" Black Color Trim

WFRL COMMERCIAL WAFER



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹
	4"	WFRL6R139FADWB	 2700K 3000K 3500K 4000K 5000K	13W	75W INC	1,000	77
		WFRL6R139FADWS	 2700K 3000K 3500K 4000K 5000K	13W	75W INC	1,000	77
	6"	WFRL8R239FADWB	 2700K 3000K 3500K 4000K 5000K	23W	150W INC	1,800	78
		WFRL8R239FADWS	 2700K 3000K 3500K 4000K 5000K	23W	150W INC	1,800	78

White

Finishes



1. Numbers are nominal.

Mounting Accessories

Goof Rings

Catalog No.

WFRL-GOOF-6R-8R-W - 6" Goof ring round white

Extension Cables

Catalog No.

EXTCBL-FA-6 - 6 ft extension cable

EXTCBL-FA-12- 12 ft extension cable

EXTCBL-FA-20- 20 ft extension cable

Emergency Driver

Catalog No.

DRI-25-EMGR-DC - Emergency driver 25W.

DRI-21-EMGR-DC-D10 - Emergency driver 21W

T20 compliant.

Accessories

Catalog No.

4" Smooth Color Trim

DLTRIM/WFRL4S-B5 - Black trim, round

DLTRIM/ WFRL4S-BSN - Brushed nickel, round

DLTRIM/ WFRL4S-BRS - Bronze trim, round

4" Baffle Color Trim

DLTRIM/WFRL4S-BB - Black trim, round

DLTRIM/ WFRL4S-BNB - Brushed nickel, round

DLTRIM/ WFRL4S-BRB - Bronze trim, round

6" Smooth Color Trim

DLTRIM/WFRL6S-B5 - Black trim, round

DLTRIM/ WFRL6S-BSN - Brushed nickel, round

DLTRIM/ WFRL6S-BRS - Bronze trim, round


6" Baffle Color Trim

DLTRIM/WFRL6S-BB - Black trim, round

DLTRIM/ WFRL6S-BNB - Brushed nickel, round

DLTRIM/ WFRL6S-BRB - Bronze trim, round

Cylinders



Also designed for outdoor applications.

CD34



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	3" Wall Mount	CD34-3WW CD34-3WK CD34-3WZ	 3000K 4000K 5000K	10/8/6W	up to 75W INC	1,000	100	25°
	4" Wall Mount	CD34-4WW CD34-4WK CD34-4WZ	 3000K 4000K 5000K	20/16/12W	up to 125W INC	2,000	100	40°
	6" Wall Mount	CD34-6WW CD34-6WK CD34-6WZ	 3000K 4000K 5000K	36/28/22W	up to 200W INC	3,330	95	60°
	4" Surface/ Pendant Mount	CD34-4SPW CD34-4SPK CD34-4SPZ	 2700K 3000K 3500K 4000K 5000K	20/16/12W	up to 125W INC	1,900	95	40°
	6" Surface/ Pendant Mount	CD34-6SPW CD34-6SPK CD34-6SPZ	 2700K 3000K 3500K 4000K 5000K	30/24/18W	up to 175W INC	2,700	90	60°

Finishes

White  Black  Bronze 



* Cord, Surface, and Pendant mount models are adjustable wattage, CCT. Wall mounts include adjustable wattage, CCT, and on/off photocell. Wall mounts also include field-selectable distribution: uplight, downlight, both.

¹ Lumen values are for models with wall direct mount & pendant mount. For other mounting options, visit rablighting.com for exact output based on your specific configuration. Pendant accessory must be purchased for pendant mounts.

Mounting Accessories

Pendant Mount

Catalog No.

CD34STEM-K - 12" stem, black
CD34STEM-W - 12" stem, white
CD34STEM-Z - 12" stem, bronze

Accessories

Swappable Lens

Catalog No.

CD34LENS-3FRK - 3" frosted lens, black
CD34STEM-3FRW - 3" frosted lens, white
CD34STEM-3FRZ - 3" frosted lens, bronze
CD34LENS-4FRK - 4" frosted lens, black
CD34STEM-4FRW - 4" frosted lens, white
CD34STEM-4FRZ - 4" frosted lens, bronze
CD34LENS-6FRK - 6" frosted lens, black
CD34STEM-6FRW - 6" frosted lens, white
CD34STEM-6FRZ - 6" frosted lens, bronze

Swappable Optics


Catalog No.

CD34REF-325D - 3" 25° beam
CD34REF-340D - 3" 40° beam
CD34REF-360D - 3" 60° beam
CD34REF-425D - 4" 25° beam
CD34REF-440D - 4" 40° beam
CD34REF-460D - 4" 60° beam
CD34REF-625D - 6" 25° beam
CD34REF-640D - 6" 40° beam
CD34REF-660D - 6" 60° beam

Vanity



ALLURE




CRI	Type	Catalog No.	Shape	Size	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Voltage	
 90 CRI	Wall Sconce	ALR-RB	Round	14"	 2700K 3000K 3500K 4000K 5000K	16W	100W INC	1,100	74	120	
		ALR-SN	Square								
	Vanity	ALR-24RB	Round	24"	 2700K 3000K 3500K 4000K 5000K	24W	170W INC	1,700	78	120	
		ALR-24SN	Square								
		ALR-36RB	Round	36"		30W	190W INC	1,900	68	120	
		ALR-36SN	Square								
		ALR-48RB	Round	48"		38W	220W INC	2,240	64	120	
		ALR-48SN	Square								



1. Numbers are nominal.



ENCHANT



CRI	Type	Catalog No.	Size	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Voltage
	Wall Sconce	ENCT-BN	10"	 2700K 3000K 3500K 4000K 5000K	20W	150W INC	1,500	75	120
	Vanity	ENCT-24BN	24"	 2700K 3000K 3500K 4000K 5000K	28W	220W INC	2,200	80	120
		ENCT-36BN	36"	 2700K 3000K 3500K 4000K 5000K	38W	320W INC	3,200	85	120
		ENCT-48BN	48"	 2700K 3000K 3500K 4000K 5000K	50W	420W INC	4,200	84	120

Brushed Nickel

Finish



¹. Numbers are nominal.

Floodlights



	X22™	X17™ FA	X17™ XFU	X17™ PA	X34®
Lumen Packages	9	6	7	1	9
Field-Adjustable CCT	✓	✓	✓		✓
Field-Adjustable Wattage	✓		✓	✓	✓
Selectable Photocell	✓	✓	✓	✓	✓
Selectable Optics	✓				
DLC Listing	Premium	Premium	Premium	Premium	Standard & Premium





X22™



SELECTABLE
BEAM



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	NEMA Type
SMALL	X22-20	3000K 4000K 5000K	20/17/13/10W	up to 100W MH	3,060	155	7H x 7V
	X22-35	3000K 4000K 5000K	35/30/25/20W	up to 175W MH	5,091	156	7H x 7V
MEDIUM	X22-60	3000K 4000K 5000K	60/50/40/30W	up to 350W MH	9,004	159	7H x 7V
	X22-80	3000K 4000K 5000K	80/70/60/50W	up to 400W MH	12,282	161	7H x 7V
LARGE	X22-150	3000K 4000K 5000K	150/125/100/75W	up to 750W MH	21,836	151	7H x 7V
XL	X22-250	3000K 4000K 5000K	250/220/190/160W	up to 1,000W MH	36,044	154	7H x 7V
	X22-320	3000K 4000K 5000K	320/280/240/200W	up to 1,000W MH	45,473	149	7H x 7V
XXL	X22-420	3000K 4000K 5000K	420/380/340/300W	up to 2,000W MH	64,206	158	7H x 7V
	X22-500	3000K 4000K 5000K	500/450/420/380W	up to 2,000W MH	73,110*	154	7H x 7V

Bronze White

Finishes



X22-20 & X22-35: Knuckle mount installed with yoke mount included.

X22-60 & X22-80: Knuckle mount installed with trunnion mount included.

X22-150-500: Slipfitter mount installed with trunnion mount included. 480V only available in 150W-500W.

X17™ FA



Size	Catalog No.¹	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	NEMA Type
SMALL	X17FA15	 3000K 4000K 5000K	15W	70W MH	2,259	152	7H x 6V
	X17FA35	 3000K 4000K 5000K	35W	150W MH	5,034	146	7H x 6V
MEDIUM	X17FA60x	 3000K 4000K 5000K	60W	250W MH	8,372	146	7H x 6V
	X17FA80x	 3000K 4000K 5000K	80W	400W MH	11,509	146	7H x 6V
LARGE	X17FA105x	 3000K 4000K 5000K	105W	400W MH	14,129	141	7H x 6V
	X17FA140x	 3000K 4000K 5000K	140W	750W MH	19,158	142	7H x 6V

Finishes  Bronze  White



1. X in the catalog matrix represents (blank) knuckle, (SF) slipfitter, (T) trunnion for 60 and 80 models, and just (SF) and (T) for 105 and 140 models.

Mounting Accessories

Trunnion Mount (X17/X17XFU only)

Catalog No. TX17-60-80 (60W-80W bronze models)

TXW17-60-80 (60W-80W white models)

Slipfitter Mount (X17/X17XFU only)

Catalog No. SFX17-60-80 (60W-80W bronze models)

SFWX17-60-80 (60W-80W white models)

Wire Guard (X17/X17XFU only)

Catalog No. GDX17-15-35 (15W-35W models)

GDX17-60-80 (60W-80W models)

GDX17-105-140 (105W-140W models)



X17™ XFU



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	NEMA Type
SMALL	X17XFU35	 3000K 4000K 5000K	35/25/15W	up to 150W MH	2,160	146	7H x 7V
MEDIUM	X17XFU60	 3000K 4000K 5000K	60/50/30W	up to 250W MH	8,372	146	7H x 7V
	X17XFU80	 3000K 4000K 5000K	50/60/40W	up to 400W MH	11,509	146	7H x 7V
LARGE	X17XFU105	 3000K 4000K 5000K	105/75/50W	up to 400W MH	14,129	141	7H x 7V
	X17XFU140	 3000K 4000K 5000K	140/100/70W	up to 750W MH	19,158	142	7H x 7V
XL	X17XFU205	 3000K 4000K 5000K	205/150/100W	up to 750W MH	30,618	151	7H x 6V
XXL	X17XFU330	 3000K 4000K 5000K	330/250/175W	up to 1,000W MH	49,228	151	7H x 6V

Finishes **Bronze** **White**¹



* 205 and 330 models include a shorting cap and twistlock photocell.

1. White finish unavailable on 205 and 330 models.

OPTIONS

Adder	Catalog No. Suffix
120-277V Twistlock Photocell (205 and 330 models only)	/PCT

X17™ PA



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Efficacy	NEMA Type
XXXL	X17PA450	● 5000K	450/350/250W	up to 1,500W MH	65,733	150	7H x 6V
	X17PA450N	● 4000K			64,951	148	7H x 6V

Bronze

Finishes







OPTIONS

Adder	Catalog No. Suffix
120-277V Twistlock Photocell	/PCT



X34®



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	NEMA Type
XSMALL	X34XS	 3000K 4000K 5000K	16/13/10W	70W MH	2,353	151	7H x 7V
SMALL	X34S	 3000K 4000K 5000K	35/25/20W	125W MH	4,677	151	7H x 7V
MEDIUM	X34S	 3000K 4000K 5000K	65/55/45W	350W MH	9,718	166	7H x 7V
LARGE	X34L	 3000K 4000K 5000K	90/80/70W	400W MH	14,040	164	7H x 7V
XL	X34XL	 3000K 4000K 5000K	130/110/95W	750W MH	20,065	163	7H x 6V
XXL	X34XXL	 3000K 4000K 5000K	160/140/120W	750W MH	24,168	165	7H x 6V

Bronze White

Finishes



* L, XL and XXL models only. 1. Extra Small, Small, Medium and Large are either 120V or 277V. XL and XXL are 120-277V.

X34® HIGH OUTPUT



250W	X34-250	 3000K 4000K 5000K	250W	1,000W MH	39,653	175	7H x 6V
350W	X34-350	 3000K 4000K 5000K	350W	1,500W MH	55,845	179	7H x 6V
450W	X34-450	 3000K 4000K 5000K	450W	2,000W MH	68,262	173	7H x 6V

Bronze

Finishes



X34® RGB



Size	Catalog No.	CCT & RGB	Wattage	Equivalent	Max. Lumens	Max. Efficacy	NEMA Type
SMALL	X34SRGBW	 	30W	125W MH	3,932	131	7H x 7V
MEDIUM	X34MRGBW	 	60W	350W MH	8,131	136	7H x 7V
LARGE	X34LRGBW	 	90W	400W MH	11,672	132	7H x 7V
XXL	X34XXLRGBW	 	160W	750W MH	20,732	133	7H x 7V

Finishes Bronze White



Lightcloud®

Light level, CCT and RGB are all controlled via the Lightcloud Blue app.

Traditional Wall Packs



	W22	W17	W34 FA	WP1/2/3 FA	WP1/2/3 XFU
Lumen Packages	4	6	3	7	9
Field-Adjustable CCT	✓		✓	✓	✓
Field-Adjustable Wattage	✓		✓		✓
Selectable Photocell	✓		✓	✓	✓
Adjustable Optics	✓				
Lightcloud®				✓	✓
Lightcloud® Blue				✓	✓
DLC Listing	Premium	Standard	Premium	Premium	Premium

W22™



ADJUSTABLE
THROW



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
SMALL	W22-S-30	 3000K 4000K 5000K	30/25/20/15W	up to 125W MH	4,508	151	10 - 20'
MEDIUM	W22-M-60	 3000K 4000K 5000K	60/50/40/30W	up to 250W MH	9,105	153	15 - 30'
	W22-M-100	 3000K 4000K 5000K	100/85/70/50W	up to 400W MH	14,021	151	20 - 40'
LARGE	W22-L-150	 3000K 4000K 5000K	150/125/100/75W	up to 750W MH	20,485	147	20 - 45'

Bronze

Finishes



OPTIONS

Adder **Catalog No. Suffix**
 Selectable Photocell w/Battery Backup /E



TRADITIONAL WALL PACKS

W17™



Size	Catalog No.	CCT	Wattage	Equivalent	Lumens	Efficacy	Mt. Height
SMALL	W17-30L	● 5000K	30W	100W MH	2,898	118	8 - 20'
	W17-30L-N	● 4000K			2,888	117	
	W17-30L-Y	● 3000K			2,720	110°	
	W17-36L	● 5000K	33W	100W MH	3,599	119	8 - 20'
	W17-36L-N	● 4000K			3,587	118	
MEDIUM	W17-55L	● 5000K	50W	150W MH	5,695	124	12 - 20'
	W17-55L-N	● 4000K			5,648	122	
	W17-55L-Y	● 3000K			5,277	114	
	W17-75L	● 5000K	69W	200W MH	8,067	124	12 - 30'
	W17-75L-N	● 4000K			8,000	122	
	W17-75L-Y	● 3000K			7,474	114	
	W17-90L	● 5000K	86W	250W MH	9,296	124	12 - 30'
	W17-90L-N	● 4000K			9,501	119	
	W17-90L-Y	● 3000K			8,600	114	
LARGE	W17-150L	● 5000K	139W	400W MH	15,974	124	12 - 30'
	W17-150L-N	● 4000K			15,217	119	
	W17-150L-Y	● 3000K			14,852	116	

Bronze

Finishes



OPTIONS

Adder

120-277V Button Photocell

Catalog No. Suffix

/PCU

W34®



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
SMALL	W34S	 3000K 4000K 5000K	35/25/17W	175W MH	5,431	149	10 - 25'
MEDIUM	W34M	 3000K 4000K 5000K	80/60/40W	400W MH	12,127	146	15 - 40'
LARGE	W34L	 3000K 4000K 5000K	150/100/75W	750W MH	20,946	159	20 - 45'

Bronze

Finishes





TRADITIONAL WALL PACKS

WP1/2/3 FA



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
SMALL	WP1FA29	 3000K 4000K 5000K	29W	70W MH	4,204	148	8 - 20'
MEDIUM	WP2FA29	 3000K 4000K 5000K	29W	100W MH	4,350	153	12 - 20'
	WP2FA40	 3000K 4000K 5000K	40W	150W MH	5,714	145	12 - 20'
	WP2F60	 3000K 4000K 5000K	60W	200W MH	8,583	147	12 - 30'
	WP2FA80	 3000K 4000K 5000K	80W	400W MH	12,770	159	12 - 40'
LARGE	WP3FA50	 3000K 4000K 5000K	50W	200W MH	7,695	151	12 - 30'
	WP3FA150	 3000K 4000K 5000K	150W	400W MH	23,223	150	12 - 50'

Bronze

Finishes



OPTIONS

Adder	Catalog No. Suffix
Lightcloud® Controllor	/LC
Lightcloud® Blue	/LCB
Lightcloud® Blue PIR Sensor	/LCBS
Lightcloud® Blue MVS Sensor	/LCBS/MVS

WP1/2/3 XFU



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
SMALL	WP1XFU29	 3000K 4000K 5000K	29/20/15W	up to 125W MH	4,204	153	8 - 20'
MEDIUM	WP2XFU29	 3000K 4000K 5000K	29/20/15W	up to 125W MH	4,350	157	8 - 20'
	WP2XFU40	 3000K 4000K 5000K	40/30/20W	up to 175W MH	5,714	159	12 - 20'
	WP2XFU60	 3000K 4000K 5000K	60/45/35W	up to 250W MH	8,583	153	12 - 25'
	WP2XFU80	 3000K 4000K 5000K	80/60/40W	up to 400W MH	12,770	169	12 - 30'
	WP2XFU100	 3000K 4000K 5000K	100/80/60W	up to 400W MH	15,745	166	12 - 40'
LARGE	WP3XFU50	 3000K 4000K 5000K	50/40/30W	up to 200W MH	7,695	159	12 - 20'
	WP3XFU120	 3000K 4000K 5000K	120/100/80W	up to 400W MH	18,718	161	12 - 40'
	WP3XFU150	 3000K 4000K 5000K	150/130/100W	up to 750W MH	23,223	159	12 - 50'

Bronze

Finishes



OPTIONS

Adder	Catalog No. Suffix
Lightcloud® Controller	/LC
Lightcloud® Blue PIR Sensor	/LCBS
Lightcloud® Blue MVS Sensor	/LCBS/MVS

Cutoff Wall Packs & Entry Lights



	SLIM15	SLIM17	SLIM22	BRISK17	BULKHEAD
Type	Cutoff	Cutoff	Non-Cutoff	Entry	Decorative
Lumen Packages	1	7	4	2	3
Field-Adjustable CCT		✓	✓	✓	✓
Field-Adjustable Wattage	✓		✓		✓
Selectable Photocell		✓*	✓		✓
Adjustable Optics		✓**	✓		
Lightcloud*	✓	✓	✓		
Lightcloud* Blue		✓			
DLC Listing		Premium	Premium	Premium	

*All models except the Small.

**Small model only.

SLIM® 22



ADJUSTABLE
THROW



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Mt. Height
SMALL	SLIM22-S-30	3000K 4000K 5000K	30/25/20/15W	up to 125W MH	4,821	153	10 - 20'
	SLIM22-S-60	3000K 4000K 5000K	60/50/40/30W	up to 250W MH	8,804	149	15 - 30'
MEDIUM	W22-M-100	3000K 4000K 5000K	100/85/70/50W	up to 400W MH	14,274	145	20 - 40'
LARGE	SLIM22L-150	3000K 4000K 5000K	150/125/100/75W	up to 750W MH	21,547	145	20 - 45'

Finishes **Bronze** **White**



¹. Numbers are nominal and are shown at 0° angle.

*Battery backup option only for 120-277V models.


OPTIONS

Adder Catalog No. Suffix
Selectable Photocell w/Battery Backup /E



CUTOFF WALL PACKS & ENTRY LIGHTS

SLIM® 17 FA



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
SMALL ADJUSTABLE ¹	SLIM17FA15ADJ	3000K 4000K 5000K	15W	70W MH	1,904	136	1.5 - 10'
	SLIM17FA30ADJ	3000K 4000K 5000K	30W	100W MH	3,813	134	3 - 15'
MEDIUM FULL CUTOFF	SLIM17FAFC40	3000K 4000K 5000K	40W	250W MH	5,421	142	10 - 25'
	SLIM17FAFC60	3000K 4000K 5000K	60W	350W MH	8,190	140	10 - 30'
LARGE FULL CUTOFF	SLIM17FAFC100	3000K 4000K 5000K	100W	400W MH	14,984	103	15 - 35'
	SLIM17FAFC120	3000K 4000K 5000K	120W	750W MH	15,557	141	15 - 40'
	SLIM17FAFC150	3000K 4000K 5000K	150W	750W MH	22,217	143	15 - 40'

Bronze

Finishes



*Only Medium and Large sizes include on/off photocell.

1. 15W and 30W models are fully optically adjustable from full cutoff up to 90° in 15° increments

OPTIONS

Adder	Catalog No. Suffix
Lightcloud® Controller ¹	/LC
Lightcloud® Blue PIR Sensor ¹	/LCBS
Lightcloud® Blue MVS Sensor ¹	/LCBS/MVS

¹Only available for full cutoff models.

SLIM® 15



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
SLIM15	SLIM15	● 5000K	34/25/13W	100W MH	3,907	118	8 - 20'
	SLIM15N	● 4000K			3,695	114	

Finishes: *Bronze*  *White* 

BRISK® 17 FA



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
20W	BRISK17FA20	 3000K 4000K 5000K	20W	up to 100W MH	2,921	147	8 - 10'
30W	BRISK17FA30	 3000K 4000K 5000K	30W	up to 100W MH	4,362	147	8 - 10'

Finishes: *Bronze*  *White* 



CUTOFF WALL PACKS & ENTRY LIGHTS

BULKHEAD



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
10W	BULKH10	3000K 4000K 5000K	10/8/6W	up to 75W MH	1,002	107	8 - 10'
15W	BULKH15R	3000K 4000K 5000K	15/12/9W	up to 100W MH	1,684	119	8 - 10'
20W	BULKH20	3000K 4000K 5000K	20/16/12W	up to 100W MH	2,043	115	8 - 10'

Finishes Bronze White



* Only available in oval shape

** Only available in round shape

Area Lights



	A22™	A17™	A17™XFU	A34™	YBLED®
Lumen Packages	5	7	2	4	2
Field-Adjustable CCT	✓	✓	✓	✓	✓
Field-Adjustable Wattage	✓	✓	✓	✓	✓
Selectable Photocell			✓	✓	✓
Selectable Optics	✓				
Universal Adjustable Pole Mount	✓		✓		
Lightcloud® Blue	✓	✓	✓	✓	
DLC Listing	Premium	Premium	Premium	Premium	Premium



A22™



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
SMALL	A22-70	3000K 4000K 5000K	70/60/50W	up to 350W MH	10,185	153	15 - 30'
	A22-100	3000K 4000K 5000K	100/80/60W	up to 400W MH	13,597	151	15 - 30'
MEDIUM	A22-150	3000K 4000K 5000K	150/120/100W	up to 400W MH	20,731	153	15 - 35'
	A22-150X	3000K 4000K 5000K	150/120/100W	up to 400W MH	22,117	163	15 - 35'
	A22-200	3000K 4000K 5000K	200/180/160W	up to 750W MH	25,995	151	20 - 40'
LARGE	A22-320	3000K 4000K 5000K	320/280/250W	up to 1,00W MH	41,753	147	20 - 45'

Finishes: Bronze White Black



OPTIONS

Adder
7-Pin Receptacle with Shorting Cap and Microwave Occupancy Sensor

Catalog No. Suffix
/MVS

Adder
Lightcloud® Blue PIR Sensor
Lightcloud® Blue MVS Sensor

Catalog No. Suffix
/LCBS
/LCBS/MVS

Mounting Accessories

Catalog No.

- A22SF - A22 Slipfitter Bronze
- A22SFW - A22 Slipfitter White
- A22SFB - A22 Slipfitter Black
- A22WM - A22 Wall Mount Bronze
- A22WMW - A22 Wall Mount White
- A22WMB - A22 Wall Mount Black
- A22PM - A22 Non Adjustable Pole Mt Kit Bronze
- A22PMB - A22 Non Adjustable Pole Mt Kit Black
- A22PMW - A22 Non Adjustable Pole Mt Kit White

Photocells/Sensors

Catalog No.

- MVS50 - High Ceiling Low Voltage MVS Sensor White
- MVS50/LCB - LC Blue High Ceiling Low Volt Luminaire Controller W/MVS White
- PIR40 - High Ceiling Low Voltage PIR Sensor White
- PIR40/LCB - LC Blue High Ceiling Low Volt Luminaire Controller W/PIR White
- MVS20 - Low Ceiling Low Voltage MVS Sensor White
- MVS20/LCB - LC Blue Low Ceiling Low Volt Luminaire Controller With MVS White
- PIR20 - Low Ceiling Low Voltage PIR Sensor White
- PIR20/LCB - LC Blue Low Ceiling Low Volt Luminaire Controller With PIR White
- LCTWIST/K - LCTwistlock Photocell 120-277V Black
- R-3P-PCT - RAB 3 Pin Twistlock Photocell 120-277V
- R-3P-PCT-480V - RAB 3 Pin Twistlock Photocell 480V
- MSR1 - Multi Sensor Remote

Interchangeable Lenses

Catalog No.

- A22-70/100LENS2T - Type 2 Lens Kit A22-70 And A22-100
- A22-70/100LENS4T - Type 4 Lens Kit A22-70 And A22-100
- A22-70/100LENS5T - Type 5 Lens Kit A22-70 And A22-100
- A22-150/200LENS2T - Type 2 Lens Kit A22-150 And A22-200
- A22-150/200LENS4T - Type 2 Lens Kit A22-150 And A22-200
- A22-150/200LENS5T - Type 2 Lens Kit A22-150 And A22-200
- A22-320LENS2T - Type 2 Lens Kit
- A22-320 A22-320LENS4T - Type 4 Lens Kit
- A22-320 A22-320LENS5T - TYPE 5 LENS KIT A22-320

Shields

Catalog No.

- A22-70/100HS - A22 70/100W House Side Shield Bronze
- A22-70/100HSB - A22 70/100W House Side Shield Black
- A22-70/100HSW - A22 70/100W House Side Shield White
- A22-150/200HS - A22 150/200W House Side Shield Bronze
- A22-150/200HSB - A22 150/200W House Side Shield Black
- A22-150/200HSW - A22 150/200W House Side Shield White
- A22-320HS - A22 320W House Side Shield Bronze
- A22-320HSB - A22 320W House Side Shield Black
- A22-320HSW - A22 320W House Side Shield White

A17™



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy	Mt. Height
SMALL	A17-4T70	 3000K 4000K 5000K	70/60/50W	up to 350W MH	10,855	159	10 - 30'
	A17-4T100		100/80/60W	up to 400W MH	15,585	164	10 - 35'
	A17-4T150		150/120/100W	up to 750W MH	22,709	164	15 - 40'
MEDIUM	A17-4T200	 3000K 4000K 5000K	200/180/160W	up to 750W MH	31,037	165	20 - 40'
	A17-4T300		300/240/200W	up to 1,000W MH	45,414	161	20 - 55'
LARGE	A17-4T375	 3000K 4000K 5000K	375/300/240W	up to 1,500W MH	58,208	166	20 - 55'
	A17-4T480		480/400/320W	up to 1,500W MH	71,177	165	25 - 55'

Bronze

Finishes



1. Performance shown for Type IV distribution. Visit rablighting.com for Type III and Type V performance information.

OPTIONS

Adder	Catalog No. Suffix	Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
3-Pin Receptacle and Shorting Cap	/3PRS	Microwave Motion Sensor	/MVS	Lightcloud® Blue PIR Sensor	/LCBS
7-Pin Receptacle and Shorting Cap	/7PRS			Lightcloud® Blue MVS Sensor	/LCBS/MVS

Mounting Accessories

Wall Mount

Catalog No. A17-WM

Slipfitter Mount

Catalog No. A17-SF-KIT-S-M
A17-SF-KIT-L

Adjustable Universal Pole Mount

Catalog No. A17-ADJ-KIT-S-M
A17-ADJ-KIT-L

Additional Accessories

Twistlock Photocell

Catalog No. RPCT
RPCT-480

House Side Shield

Catalog No. A17-RHS-S
A17-RHS-M
A17-RHS-L

Remote Control for Microwave Sensor

Catalog No. MSR1



A17™ XFU



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy	Mt. Height
SMALL	A17XFU150	3000K 4000K 5000K	150/100/70W	up to 750W MH	23,339	166	20 - 30'
MEDIUM	A17XFU300	3000K 4000K 5000K	300/240/200W	up to 1,000W MH	46,356	163	25 - 40'

Bronze

Finishes



A17 XFU comes standard with: Adjustable Universal Pole Mount; 7-Pin Receptacle; Shorting Cap. Twistlock Photocell is included.
1. Performance shown for Type IV distribution.

OPTIONS

Adder	Catalog No. Suffix	Adder	Catalog No. Suffix
Microwave Motion Sensor	/MVS	Lightcloud® Controller	/LC
		Lightcloud® Blue PIR Sensor	/LCBS
		Lightcloud® Blue MVS Sensor	/LCBS/MVS

Mounting Accessories

Wall Mount

Catalog No. A17-WM

Slipfitter Mount

Catalog No. A17-SF-KIT-S-M

A17-SF-KIT-L

Adjustable Universal Pole Mount

Catalog No. A17-ADJ-KIT-S-M

A17-ADJ-KIT-L

Additional Accessories

Twistlock Photocell

Catalog No. RPCT

RPCT-480

House Side Shield

Catalog No. A17-RHS-S

A17-RHS-M

A17-RHS-L

Remote Control for Microwave Sensor

Catalog No. MSR1

YBLED®



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Max. Efficacy	Mt. Height
YBLED	YBLED	3500K 4000K 5000K	60/50/40W	250W MH	8,969	161	10'-25'
YBLEDH	YBLEDH	3500K 4000K 5000K	120/100/80W	400W MH	16,633	163	15'-35'

Finishes *Silver*



OPTIONS

Adder Catalog No. Suffix
120-277V Twistlock Photocell /PCT

Mounting Accessories

24" Mounting Arm
Catalog No. YARM24

Garage & Canopy



	PARK34	VAN17
Sizes Available	1	2
Field-Adjustable CCT	✓	✓
Field-Adjustable Wattage	✓	✓
Selectable Photocell		✓
Lightcloud® Blue Sensors	✓	✓
DLC Listing	Premium	Premium

PARK34



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
40W	PARK34-40	 3000K 4000K 5000K	40/30/20W	175W MH, 150W HPS	5,899	8 - 12'
70W	PARK34-70	 3000K 4000K 5000K	70/60/50W	250W MH, 200W HPS	9,088	10 - 20'

Finishes
Bronze 
White 





OPTIONS

Adder	Catalog No. Suffix
Battery Backup	/E

Sensor Accessories

Catalog No.

PIR20 - PIR Sensor Kit - White

MVS20 - MVS Sensor Kit - White

PIR20B - PIR Sensor Kit - Black

MVS20B - MVS Sensor Kit - Black

PIR40/LCB - PIR Sensor Kit with Lightcloud® Blue - White

MVS20/LCB - MVS Sensor Kit with Lightcloud® Blue - White

PIR20B/LCB - PIR Sensor Kit with Lightcloud® Blue - Black

MVS50B/LCB - MVS Sensor Kit with Lightcloud® Blue - Black

VAN17™



Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy	Mt. Height
30W	VAN17-30	 3000K 4000K 5000K	30/25/20W	150W MH	4,453	153	8 - 12'
50W	VAN17-50	 3000K 4000K 5000K	50/40/30W	200W MH	7,119	151	8 - 12'
60W	VAN17-60	 3000K 4000K 5000K	60/50/40W	250W MH	8,806	157	10 - 20'
90W	VAN17-90	 3000K 4000K 5000K	90/80/70W	400W MH	12,929	155	10 - 20'

Finishes
Bronze 
White 





OPTIONS

Adder	Catalog No. Suffix
Battery Backup	/E

Sensor Accessories

Catalog No.

PIR20 - PIR Sensor Kit - White

MVS20 - MVS Sensor Kit - White

PIR20B - PIR Sensor Kit - Black

MVS20B - MVS Sensor Kit - Black

PIR40/LCB - PIR Sensor Kit with Lightcloud® Blue - White

MVS20/LCB - MVS Sensor Kit with Lightcloud® Blue - White

PIR20B/LCB - PIR Sensor Kit with Lightcloud® Blue - Black

MVS50B/LCB - MVS Sensor Kit with Lightcloud® Blue - Black

Landscape Lighting



	B17™	LF17™	LF34™	LUMINATOR™	SENSOR + PAR
Type	Bollard	Floodlight	Floodlight	Security Light	Security Light
Field-Adjustable CCT	✓	✓	✓	Tunable White	✓
Field-Adjustable Wattage	✓	✓		Tunable Lumens	
Selectable Photocell	✓				
Motion Sensors				PIR	GT500, STL110, STL200, STL360
DLC Listing	Premium	Premium		Standard	



B17™ BOLLARD



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
ROUND DOME	B17D	 3000K 4000K 5000K	24/19/14W	up to 100W MH/HPS	3,409	42"
SQUARE FLAT	B17S	 3000K 4000K 5000K	24/19/14W	up to 100W MH/HPS	3,120	42"
ROUND FLAT	B17	 3000K 4000K 5000K	24/19/14W	up to 100W MH/HPS	3,409	42"

Finishes *Bronze* *White* *Black*



LUMINATOR™



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
LUMINATOR	LU160	Tunable 3000-5000K	20W	250W MH or 120W INC	2,096	8-10'

Finishes *Bronze* *White* *Black*



Sensors + Field-Adjustable PARs



GT500R
5-Year Limited



STL110[®], STL200,
STL360
10-Year Limited



3-Year,
No Compromise



FIELD ADJ.



15,000 HRS



WET RATED



120V

Model	Catalog No.	CCT	Wattage	Equivalent	Max Lumens	Mt. Height
GT	GT500R/L	 3000K 4000K 5000K	38W	150W HAL	1,800	8-12'
STL	STL110H/L STL200H/L STL360H/L	 3000K 4000K 5000K	38W	150W HAL	1,800	8-12'

Finishes   



*Black finish available on GT500 Only.

1.Models shown with bell hood. Also available with bullet hood or no hood

LF17™



5-Year
Limited



FIELD ADJ.



0-10V



50,000 HRS



IP RATING



120V

Model	Catalog No.	CCT	Wattage	Equivalent	Max Lumens	Mt. Height
LF17	LF17	 2700K 3000K 3500K 4000K 5000K	8/5/4/2/1W	up to 75W PAR30	1,115	8-10'
LF17X2	LF17X2	 2700K 3000K 3500K 4000K 5000K	8/5/4/2/1W	up to (2) 75W PAR30	2,230	8-10'

Finishes   





LF34™



5-Year
Limited



Model	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens	Mt. Height
SMALL	LF34S	 2700K 3000K 3500K 4000K 5000K	8W	up to 75W PAR30	1,043	8-10'
LARGE	LF34L	 2700K 3000K 3500K 4000K 5000K	33W	up to 70W MH	4,408	8-10'
Finishes Bronze White Black						
						

Temporary Lighting





TUFFY™



3-Year,
No Compromise



Model	Catalog No.	CCT	Wattage	Lumens	Run Time	CRI
TUFFY	TUFFY	3000K 4000K 5000K	12W	2,000 1,000 500	2 Hours 4 Hours 8 Hours	80
TUFFY XL	TUFFYXL	3000K 4000K 5000K	32W	4,000 2,000 800	4 Hours 8 Hours 12 Hours	80

Black/Red

Finishes



*Rechargeable lithium-ion battery (cable not included)

PROTEMP



5-Year,
No Compromise



Model	Color Temp.	Catalog No.	Wattage	Equivalent	Lumens ¹	Max Efficacy ¹	Beam Angle
PROTEMP	5000K	PROTEMP-100	50/100W	320W MH	up to 12,000	120l	360°
	5000K	PROTEMP-150	75/150W	400W MH	up to 18,000	120	360°

Finish Orange



¹ Numbers are nominal.

STRINGER34



Size	Color Temp.	Catalog No.	Wattage	Equivalent	Lumens	Efficacy	Mt. Height
50ft	● 5000K	STRING34-50-850	50W	200W HID	5,000	123	6-12'
100ft	● 5000K	STRING34-100-850	130W	400W HID	10,000	123	8-20'

Orange

Finish



1. Models listed with 2-prong plug. 3-prong models also available.

TEMP



Style	Color Temp.	Catalog No.	Wattage	Equivalent	Lumens ¹	Efficacy ¹	Base
TEMP	● 5000K	TEMP-60-850	60W	200W INC	7,200	120	USA plug
	● 5000K	TEMP-100-850	100W	400W INC	12,000	120	USA plug
	● 5000K	TEMP-150-850	150W	600W INC	18,000	120	USA plug

Orange

Finish



1. Numbers are nominal.

OPTIONS

Adder	Catalog No. Suffix
15ft Cord and Plug	/15CP
25ft Cord and Plug	/25CP
35ft Cord and Plug	/35CP

Lamps



A19



CRI	Base	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Dimmable
	E26	A19-6-9CCT-DIM		5.5W	40W INC	510	93	10%
		A19-8-9CCT-DIM		8W	60W INC	800	100	10%
		A19-10-9CCT-DIM		10W	75W INC	1,100	110	10%
		A19-14-9CCT-DIM		14W	100W INC	1,500	107	10%
	GU24	A19-8-GU24-9CCT-DIM		8W	60W INC	800	100	10%
		A19-10-GU24-9CCT-DIM		10W	75W INC	1,100	110	10%
		A19-14-GU24-9CCT-DIM		14W	100W INC	1,500	107	10%



1. Numbers are nominal.

BR30, BR40



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Dimmable
	BR30	BR30-7-9CCT-DIM	 3000K 3500K 4000K 5000K	7W	65W INC	700	100	10%
		BR30-14-9CCT-DIM		14W	100W INC	1,600	122	10%
		BR30-19-9CCT-DIM		19W	150W INC	2300	133	10%
	BR40	BR40-11-9CCT-DIM	 3000K 3500K 4000K 5000K	11W	85W INC	1,200	125	10%
		BR40-21-9CCT-DIM		21W	150W INC	2,400	133	10%



1. Numbers are nominal.

PAR LAMPS CCT ADJUSTABLE



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	PAR20	PAR20FA-5.5-9CCT-25D-DIM	 3000K 3500K 4000K 5000K	5.5W	50W INC	500	90	25°
		PAR20FA-5.5-9CCT-40D-DIM						40°
	PAR30S	PAR30SFA-11-9CCT-25D-DIM	 3000K 3500K 4000K 5000K	11W	75W INC	1,000	90	25°
		PAR30SFA-11-9CCT-40D-DIM						40°
	PAR30L	PAR30LFA-11-9CCT-25D-DIM	 3000K 3500K 4000K 5000K	11W	75W INC	1,000	90	25°
		PAR30LFA-11-9CCT-40D-DIM		11W	75W INC	1,000	90	40°
		PAR30LFA-15-9CCT-40D-DIM		15W	150W INC	1,800	120	40°
	PAR38	PAR38FA-13.5-9CCT-25D-DIM	 3000K 3500K 4000K 5000K	13.3W	90W INC	1,200	90	25°
		PAR38FA-13.5-9CCT-40D-DIM		13.3W	90W INC	1,200	90	40°
		PAR38FA-15.5-9CCT-40D-DIM		15.5W	100W INC	1,400	90	40°
		PAR38FA-21-9CCT-40D-DIM		21W	150W INC	3,000	142	40°



1. Numbers are nominal.

COMMERCIAL PAR LAMPS CCT ADJUSTABLE



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Beam Angle
	PAR30L	PAR30LFA-15-9CCT-40D-UNV	 3000K 3500K 4000K 5000K	15W	150W INC	2,000	120	40°
	PAR38	PAR38FA-19-9CCT-40D-UNV	 3000K 3500K 4000K 5000K	19W	250W INC	2,600	128	40°



1. Numbers are nominal.

T8 HYBRID A/B CCT-ADJUSTABLE



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Base Type
	4 ft	T8-12-48G-8CCT-HYB T8-15-48G-8CCT-HYB	 2700K 3000K 3500K 4000K 5000K	12W 15W	F32T8 F17T8	1,650 2,100	138 140	G13 G13
	3 ft	T8-11-36G-8CCT-HYB	 2700K 3000K 3500K 4000K 5000K	11W	F25T8	1,500	136	G13
	2 ft	T8-7.5-24G-8CCT-HYB	 2700K 3000K 3500K 4000K 5000K	7.5W	F17T8	1,150	153	G13



1. Numbers are nominal.

T8 HYBRID U-BEND FIELD ADJUSTABLE



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Base Type
	1" U-Bend	T8-U1G-SD-HYB	 2700K 3000K 3500K 4000K 5000K	15/13/11.5W	F31T8U	2,200	156	G13
	6" U-Bend	T8-U6G-SD-HYB	 2700K 3000K 3500K 4000K 5000K	15/13/11.5W	F17T8	2,200	156	G13



1. Numbers are nominal.



T8 TYPE B FIELD ADJUSTABLE



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Base Type
	2 ft	T8-7-24G-8CCT-BYP	 2700K 3000K 3500K 4000K 5000K	7W	F32T8	940	134	G13
	3 ft	T8-9-36G-8CCT-BYP	 2700K 3000K 3500K 4000K 5000K	9W	F25T8	1,250	139	G13
	4 ft	TFA-9.5-48G-8CCT-BYP	 2700K 3000K 3500K 4000K 5000K	9.5/11/13W	F17T8	2,200	173	G13
		TFA8-10.5-48G-8CCT-BYP	 2700K 3000K 3500K 4000K 5000K	10.5/12/14W	F32T8	2,200	157	G13



1. Numbers are nominal.

T8 8FT R17D/FA8 FIELD-ADJUSTABLE



CRI	Size	Catalog No.	CCT	Wattage	Equivalent	Max. Lumens ¹	Max. Efficacy ¹	Base Type
	8 ft	T8-96G-DE-BYP	 2700K 3000K 3500K 4000K 5000K	40/32/24W	Up to 96W FLT8	5,500	146	FA8/R17D



1. Numbers are nominal.

Exit & Emergency





EXIT34



Construction	Letter	Catalog No.	Wattage	Faces	Battery Backup	Battery Voltage
Thermoplastic	Red/Green	EXIT34-RG	1W	Single & Double	AC only	-
		EXIT34-RG/E	1W		Battery Backup	1.2V
		EXIT34-RG/E-B	1W		Battery Backup	1.2V

Finishes

White

Black*



*Black finish available on EXIT34-RG/E-B Only.

ECOMBO34



Construction	Letter	Catalog No.	Wattage	Faces	Lumens	Battery Voltage	Remote Head
Thermoplastic	Red	ECOMBO34	1.4W	Single & Double	84	3.6V	No
		ECOMBO34-R	1.6W		84	3.6V	Yes
	Red/Green	ECOMBO34-RG	1.1W		84	3.6V	No
		ECOMBO34-RGR	1.6W		84	3.6V	Yes

Finish

White



ECOMBO



Construction	Letter	Catalog No.	Wattage	Faces	Lumens	Battery Voltage	Remote Head
Thermoplastic	Red	ECOMBO	3.7W	Single & Double	90	9.6V	No
		ECOMBO-R	3.4W		90	9.6V	Yes
	Green	ECOMBO-G	3.7W		90	9.6V	No
		ECOMBO-GR	3.4W		90	9.6V	Yes

Finish ☐ White



EDGE-LIT34



Construction	Letter	Catalog No.	Wattage	Faces	Battery Voltage	Remote Head
Thermoplastic	Red	EXITEDGE34-1W	4W	Single	AC Only	No
		EXITEDGE34-1W/E	4W		AC Only	No
	Green	EXITEDGE34-1GW	4W		AC Only	No
		EXITEDGE34-1GW/E	4W		AC Only	No

Finish ☐ White





EM34



	Construction	Catalog No.	Wattage	Lumens	Battery Backup	Battery Voltage	Remote Head
Thermoplastic		EM34	1.2W	160	Battery Backup	3.6V	No
		EM34-R	2.0W	160	Battery Backup	3.6V	Yes

White

Finish



EM



	Construction	Shape	Catalog No.	Wattage	Lumens	Battery Backup	Battery Voltage	Remote Head
Thermoplastic	Square	EM	1.2W	200	Battery Backup	3.6V	No	
		EM-R	2.0W	200	Battery Backup	3.6V	Yes	
	Round	EMR	1.2W	200	Battery Backup	3.6V	No	
		EMR-R	2.0W	200	Battery Backup	3.6V	Yes	

White

Finish



Remote Accessories

Catalog No.

- EREMOTE-RTS - Emergency remote test button switch
- EREMOTEOUT-HB - Emergency remote 2 heads high lumen outdoor black
- EREMOTEOUT-H - Emergency remote 2 heads high lumen outdoor gray
- EREMOTEOUT-1HB - Emergency remote single head high lumen outdoor black
- EREMOTEOUT-1H - Emergency remote single head high lumen outdoor gray
- EREMOTEOUT-1 - Emergency remote single head outdoor gray
- EREMOTEOUT - Emergency remote 2 heads outdoor gray
- EREMOTE-B - Emergency remote 2 heads black
- EREMOTE-1 - Emergency remote single head white
- EREMOTE - Emergency remote 2 heads white

The best source for your lighting projects.



RAB offers an extensive line of indoor, outdoor, lamps and control solutions for your projects.



The assortment you want.

From spec-grade fixtures to budget-friendly economy lines, we've got it covered. And if we missed something, let us know—we have custom solutions, too.



The warranty you need.

Most RAB products are backed by our 5-Year, No-Compromise Warranty, which includes labor once reviewed and approved by RAB.



The durability you deserve.

Long-lasting finishes, stable light color temperatures, reliable drivers. It all makes for installation you can stand behind.



The brand you trust.

Reliable performance? Check. Unparalleled service? Done. No customer hassles, no callbacks—we're here to make you look good.

RAB®

Learn more:
rablighting.com

For the latest product literature, download the RAB Drive app

Get the app



Follow us



RAB is continually improving our products. Specifications may change without notice.
The designs of RAB fixtures are protected under U.S. and international intellectual property laws.



©2025 RAB Lighting, Inc.